

Precision 3680 Tower

Technical Guidebook

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

| | |
|--|-----------|
| Chapter 1: Views of Precision 3680 Tower | 6 |
| Front..... | 6 |
| Back..... | 8 |
| Chapter 2: Specifications of Precision 3680 Tower | 10 |
| Dimensions and weight..... | 10 |
| Processor..... | 10 |
| Chipset..... | 11 |
| Operating system..... | 11 |
| Memory..... | 11 |
| Memory matrix..... | 12 |
| External ports..... | 13 |
| Internal slots..... | 13 |
| Ethernet..... | 14 |
| Wireless module..... | 14 |
| Audio..... | 15 |
| Storage..... | 15 |
| Storage matrix..... | 16 |
| RAID (Redundant Array of Independent Disks)..... | 17 |
| Media-card reader..... | 18 |
| Power ratings..... | 18 |
| Power supply connector..... | 19 |
| GPU—Integrated..... | 19 |
| Multiple display support matrix..... | 20 |
| GPU—Discrete..... | 20 |
| Video port resolution..... | 21 |
| Hardware security..... | 22 |
| Environmental..... | 23 |
| Regulatory compliance..... | 23 |
| Operating and storage environment..... | 23 |
| Chapter 3: Engineering specifications | 25 |
| Physical system dimensions..... | 25 |
| Add-in card dimensions..... | 25 |
| System board connector maximum add-in card allowable dimensions..... | 25 |
| PCIe lane details | 26 |
| PCIe add-in cards..... | 27 |
| Serial port PCIe card, Low Profile..... | 27 |
| UltraSpeed Duo M.2 PCIe card..... | 27 |
| Thunderbolt 4 PCIe Add-In Card..... | 27 |
| Dust Filter..... | 28 |
| Ethernet..... | 29 |
| Intel Ethernet Connection i219-LM..... | 29 |
| Intel Ethernet Connection i226..... | 30 |

| | |
|---|----|
| Wireless module..... | 30 |
| Intel AX211, 2x2 MIMO, 2400 Mbps, 2.4/5/6 GHz, Wi-Fi 6E (WiFi 802.11ax), Bluetooth 5.3..... | 30 |
| Qualcomm WCN6856, 2x2, Wi-Fi 6E DBS, Bluetooth 5.3..... | 32 |
| GPU—Integrated..... | 33 |
| Intel UHD Graphics 730..... | 33 |
| Intel UHD Graphics 770..... | 35 |
| GPU—Discrete..... | 36 |
| NVIDIA RTX 6000 Ada Generation, 48 GB GDDR6..... | 36 |
| NVIDIA RTX 5000 Ada Generation, 24 GB GDDR6..... | 37 |
| NVIDIA RTX 4500 Ada Generation, 24 GB GDDR6..... | 37 |
| NVIDIA RTX 4000 Ada Generation, 20 GB GDDR6..... | 38 |
| NVIDIA RTX 2000 Ada Generation, 12 GB, GDDR6..... | 39 |
| NVIDIA T1000, 8 GB GDDR6..... | 39 |
| NVIDIA T1000, 8 GB GDDR6..... | 40 |
| NVIDIA T400, 4 GB GDDR6..... | 41 |
| NVIDIA GeForce RTX 4090, 24 GB, GDDR6..... | 41 |
| NVIDIA GeForce RTX 4090D, 24 GB, GDDR6..... | 42 |
| NVIDIA GeForce RTX 4080 Super, 16 GB, GDDR6X..... | 43 |
| NVIDIA GeForce RTX 4070, 12 GB, GDDR6..... | 43 |
| NVIDIA GeForce RTX 4060, 8 GB GDDR6..... | 44 |
| AMD Radeon Pro W7900, 48 GB GDDR6..... | 44 |
| AMD Radeon Pro W7600, 8 GB GDDR6..... | 45 |
| AMD Radeon Pro W7500, 8 GB GDDR6..... | 46 |
| AMD Radeon Pro W6400, 4 GB GDDR6..... | 46 |
| AMD Radeon Pro W6300, 2 GB GDDR6..... | 47 |
| GPU and PSU matrix..... | 48 |
| Video port and resolution matrix..... | 49 |
| Hard-disk drive Preloaded bracket matrix..... | 49 |
| Storage..... | 49 |
| 3.5-inch, 1 TB, 7200 RPM, SATA, HDD | 49 |
| 3.5-inch, 2 TB, 7200 RPM, SATA, HDD | 50 |
| 3.5-inch, 4 TB, 5400 RPM, SATA, HDD | 51 |
| 3.5-inch, 4 TB, 7200 RPM, SATA, Enterprise HDD | 51 |
| 3.5-inch, 8 TB, 7200 RPM, SATA, Enterprise HDD..... | 52 |
| M.2 2230, 256 GB, TLC PCIe NVMe Gen 4, Class 35 SSD..... | 52 |
| M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD..... | 53 |
| M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD..... | 54 |
| M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD..... | 54 |
| M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD..... | 55 |
| M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Opal Self-Encrypting Class 40 SSD..... | 56 |
| M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Opal Self-Encrypting Class 40 SSD..... | 56 |
| 8x DVD±RW, slimline | 57 |
| Media-card reader | 58 |
| Power supply unit..... | 58 |
| Thermal dissipation..... | 59 |
| CMOS battery..... | 59 |
| Accessories..... | 60 |
| Security..... | 60 |
| Software security..... | 60 |
| Trusted Platform Module..... | 61 |

| | |
|--|-----------|
| Mil-SPEC..... | 61 |
| Acoustic noise emission information tower..... | 63 |
| Chassis enclosure and ventilation requirements..... | 63 |
| System management features..... | 64 |
| Dell Client Command Suite for in-band systems management | 64 |
| Out-of-band systems management..... | 64 |
| Chapter 4: Dell Optimizer..... | 65 |
| Chapter 5: Getting help and contacting Dell..... | 66 |

Views of Precision 3680 Tower

Front

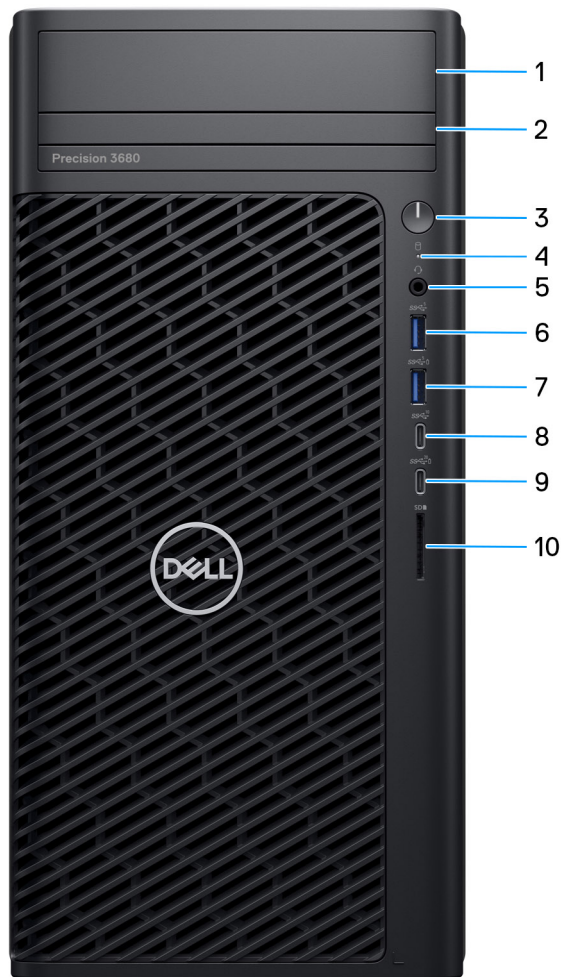


Figure 1. Image: Front view

1. Front 3.5-inch hard drive bay (optional)

Slot to install the 3.5-inch hard drive

2. Slim ODD (optional)


Reads from and writes to CDs, DVDs, and Blu ray disks.

3. Power button with diagnostic LED

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

4. **Hard-drive activity light**

Turns on when the computer reads from or writes to the hard drive.

 **NOTE:** Hard-drive activity light is supported only on computers that are shipped with hard drive.

5. **Universal audio port**

Connect headphones or a headset (headphone and microphone combo).

6. **USB 3.2 Gen 1 (5 Gbps) port**


Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps.

7. **USB 3.2 Gen 1 (5 Gbps) port with PowerShare**

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge connected USB devices.

 **NOTE:** Connected USB devices will not charge when the computer is turned off or in a sleep state. To start charging connected devices, turn on the computer.


8. **USB 3.2 Type-C Gen 2 (10 Gbps) port**

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 10 Gbps.

9. **USB 3.2 Type-C Gen 2x2 (20 Gbps) port with PowerShare**

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 20 Gbps.

PowerShare enables you to charge connected USB devices.

 **NOTE:** Connected USB devices will not charge when the computer is turned off or in a sleep state. To start charging connected devices, turn on the computer.

10. **SD-card slot**

Reads from and writes to the SD card.

Back

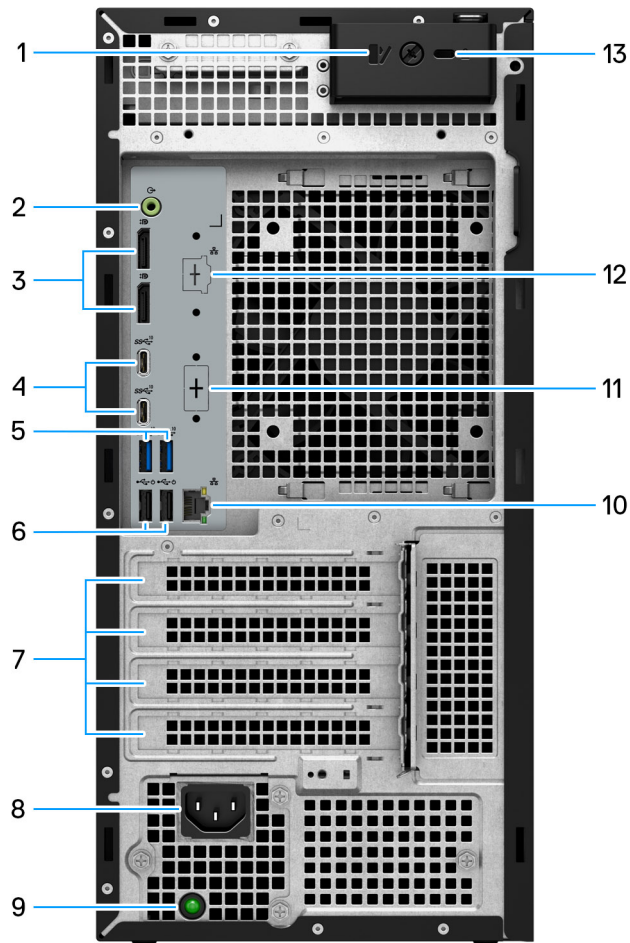


Figure 2. Image: Back view

1. Side cover release latch

Release to allow to open the side cover.

2. Audio line out port

Connect audio-output devices such as speakers and amplifiers. In a 5.1 speaker channel setup, connect the front-left and front-right speakers.

3. Two DisplayPort 1.4 ports

Connect an external display or a projector.

4. Two USB 3.2 Type-C Gen 2 (10 Gbps) ports

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 10 Gbps.

5. Two USB 3.2 Gen 2 (10 Gbps) ports

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 10 Gbps.

6. Two USB 2.0 (480 Mbps) ports with SmartPower

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 480 Mbps. Wake from standby with the keyboard or mouse that is connected to this port.

7. Expansion card slots

Provide access to ports on any installed PCI Express cards.

8. Power cord connector port

Connect a power cable to provide power to your computer.

9. Power supply diagnostic light

Indicates the power-supply state.

10. RJ45 port 10/100/1000 Mbps

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps.

11. HDMI 2.0/ DisplayPort 1.4/ VGA/ USB Type-C with DisplayPort Alt mode (optional)

The port available at this location may vary depending on the optional I/O card that is installed on your computer.

- **HDMI 2.0 port**

Connect to a TV, external display, or another HDMI-in enabled device. Maximum resolution that is supported up to 4096 x 2160 @60 Hz.

- **DisplayPort 1.4**

Connect an external display or a projector. Maximum resolution that is supported up to 5120 x 3200 @60 Hz.

- **VGA port**

Connect an external display or a projector. Maximum resolution that is supported up to 1920 x 1200 @60 Hz.

- **USB Type-C with DisplayPort port**

Connect devices such as external storage devices and printers. Provides data transfer speeds of up to 10 Gbps. Maximum resolution supported up to 5120x3200 @60Hz with a Type-C to DisplayPort adapter.

12. 2.5 GbE RJ45 port (optional)

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

13. Kensington security-cable slot


Connect a security cable to prevent unauthorized movement of your computer.

Specifications of Precision 3680 Tower

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 3680 Tower.

Table 1. Dimensions and weight

| Description | Values |
|--|---|
| Height | 372.90 mm (14.68 in.) |
| Width | 173.00 mm (6.81 in.) |
| Depth | 420.20 mm (16.54 in.) |
| Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability. | <ul style="list-style-type: none"> • Minimum - 7.58 kg (16.71 lb) • Maximum - 16.05 kg (35.38 lb) |

Processor

The following table lists the details of the processors that are supported for your Precision 3680 Tower.

Table 2. Processor

| Description | Option one | Option two | Option three | Option four | Option five | Option six | Option seven | Option eight |
|------------------------|--|---|---|--|---|--|---|--|
| Processor type | 14 th Gen Intel Core i3-14100 | 14 th Gen Intel Core i5-14500 vPro | 14 th Gen Intel Core i5-14600 vPro | 14 th Gen Intel Core i5-14600K vPro | 14 th Gen Intel Core i7-14700 vPro | 14 th Gen Intel Core i7-14700K vPro | 14 th Gen Intel Core i9-14900 vPro | 14 th Gen Intel Core i9-14900K vPro |
| Processor wattage | 60 W | 65 W | 65 W | 125 W | 65 W | 125 W | 65 W | 125 W |
| Processor core count | 4 | 14 | 14 | 14 | 20 | 20 | 24 | 24 |
| Processor thread count | 8 | 20 | 20 | 20 | 28 | 28 | 32 | 32 |
| Processor speed | 3.5 GHz to 4.7 GHz Turbo | 2.6 GHz to 5.0 GHz Turbo | 2.7 GHz to 5.2 GHz Turbo | 3.5 GHz to 5.3 GHz Turbo | 2.1 GHz to 5.4 GHz Turbo | 3.4 GHz to 5.6 GHz Turbo | 2.0 GHz to 5.8 GHz Turbo | 3.2 GHz to 6.0 GHz Turbo |
| Processor cache | 12 MB | 24 MB | 24 MB | 24 MB | 33 MB | 33 MB | 36 MB | 36 MB |
| Integrated graphics | Intel UHD Graphics 730 | Intel UHD Graphics 770 | Intel UHD Graphics 770 | Intel UHD Graphics 770 | Intel UHD Graphics 770 | Intel UHD Graphics 770 | Intel UHD Graphics 770 | Intel UHD Graphics 770 |

 **NOTE:**

1. Precision 3680 Tower supports Unlimited Turbo Duration feature (PL1=PL2) for all K-processor (125W) CPUs. A 1000W power supply and Premium Air Cooling solution are required.
2. Precision 3680 Tower supports Enhanced Performance (PL1=85W) for 65W CPUs. A Premium Air Cooling solution is required.

Chipset

The following table lists the details of the chipset that is supported for your Precision 3680 Tower.

Table 3. Chipset

| Description | Values |
|----------------|---|
| Chipset | W680 |
| Processor | 14 th Gen Intel Core i3/i5/i7/i9 |
| DRAM bus width | 64-bit DIMM |
| Flash EPROM | 16 MB + 32 MB |
| PCIe bus | Up to Gen5 |

Operating system

Your Precision 3680 Tower supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Education, 64-bit
- Windows 11 Pro for Workstations
- Ubuntu Linux 22.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Precision 3680 Tower.

Table 4. Memory specifications




| Description | Values |
|--------------|--|
| Memory slots | Four-DIMM slots  NOTE: Up to 128 GB or up to 4400 MT/s ECC and Non-ECC DDR5 |
| Memory type | DDR5 |
| Memory speed | Maximum speed: 4400 MT/s  NOTE: Maximum memory speed varies by the following configuration on each channel. If the two DIMM configuration is not symmetrical, the maximum speed may drop. <ul style="list-style-type: none"> • 4400 MT/s: 1 DIMM-1R/2R • 4000 MT/s: 2 DIMM-1R • 3600 MT/s: 2 DIMM-2R |

Table 4. Memory specifications (continued)


| Description | Values |
|---------------------------------|--|
| Maximum memory configuration | 128 GB |
| Minimum memory configuration | 8 GB |
| Memory size per slot | 8 GB, 16 GB, and 32 GB |
| Memory configurations supported | <ul style="list-style-type: none"> ● 8 GB: 1 x 8 GB, DDR5, 4400 MT/s, Non-ECC ● 16 GB: 2 x 8 GB, DDR5, 4400 MT/s, Non-ECC, dual-channel ● 16 GB: 1 x 16 GB, DDR5, 4400 MT/s, Non-ECC ● 32 GB: 2 x 16 GB, DDR5, 4400 MT/s, Non-ECC, dual-channel ● 32 GB: 4 x 8 GB, DDR5, 4000 MT/s, Non-ECC, dual-channel ● 64 GB: 2 x 32 GB, DDR5, 4400 MT/s, Non-ECC, dual-channel ● 64 GB: 4 x 16 GB, DDR5, 4000 MT/s, Non-ECC, dual-channel ● 128 GB: 4 x 32 GB, DDR5, 3600 MT/s, Non-ECC, dual-channel ● 16 GB: 1 x 16 GB, DDR5, 4400 MT/s, ECC ● 32 GB: 2 x 16 GB, DDR5, 4400 MT/s, ECC, dual-channel ● 64 GB: 2 x 32 GB, DDR5, 4400 MT/s, ECC, dual-channel ● 64 GB: 4 x 16 GB, DDR5, 4000 MT/s, ECC, dual-channel ● 128 GB: 4 x 32 GB, DDR5, 3600 MT/s, ECC, dual-channel <p> NOTE: ECC memory is not supported on the Intel Core i3-14100 processor.</p> |

Memory matrix

The following table lists the memory configurations supported on your Precision 3680 Tower.

Table 5. Memory matrix

| Configuration | Slot | | | |
|---------------|-------|-------|-------|-------|
| | DIMM1 | DIMM2 | DIMM3 | DIMM4 |
| 8 GB DDR5 | 8 GB | N/A | N/A | N/A |
| 16 GB DDR5 | 16 GB | N/A | N/A | N/A |
| 16 GB DDR5 | 8 GB | 8 GB | N/A | N/A |
| 32 GB DDR5 | 16 GB | 16 GB | N/A | N/A |
| 64 GB DDR5 | 32 GB | 32 GB | N/A | N/A |
| 64 GB DDR5 | 16 GB | 16 GB | 16 GB | 16 GB |
| 128 GB DDR5 | 32 GB | 32 GB | 32 GB | 32 GB |

 **NOTE:** 8 GB configuration available only for non-ECC memory.

External ports

The following table lists the external ports of your Precision 3680 Tower.

Table 6. External ports

| Description | Values |
|---------------------|---|
| Network port | <ul style="list-style-type: none"> One RJ45 (1 GbE) Ethernet port One RJ45 (2.5 GbE) Ethernet port (optional) |
| USB ports | <p>Front:</p> <ul style="list-style-type: none"> One USB 3.2 Gen 1 (5 Gbps) port One USB 3.2 Gen 1 (5 Gbps) port with PowerShare One USB 3.2 Gen 2 (10 Gbps) Type-C port One USB 3.2 Gen 2x2 (20 Gbps) Type-C port with PowerShare <p>Rear:</p> <ul style="list-style-type: none"> Two USB 2.0 (480 Mbps) ports with SmartPower Two USB 3.2 Gen 2 (10 Gbps) ports Two USB 3.2 Gen 2 (10 Gbps) Type-C ports |
| Audio port | <ul style="list-style-type: none"> Front: One Universal Audio port Rear: One Audio line-out |
| Video port | <ul style="list-style-type: none"> Two DisplayPort 1.4a HBR2 ports One Optional Port (VGA, HDMI 2.0, DP++ 1.4a HBR3, USB 3.2 Gen 2 (10 Gbps) Type-C with DP-Alt mode) <p>NOTE: Download and install the latest Intel Graphics driver from www.dell.com/support to enable multiple displays.</p> |
| Media-card reader | One SD-card slot |
| Power-adaptor port | N/A |
| Security-cable slot | One Kensington security-cable slot |


Internal slots

The following table lists the internal slots of your Precision 3680 Tower.

Table 7. Internal slots

| Description | Values |
|-------------|--|
| M.2 | <ul style="list-style-type: none"> One M.2 2230 slot for WiFi and Bluetooth card Two M.2 2230/2280 slots (SSD0 and SSD1) for SSD One M.2 2280 slot (SSD2) for SSD <p>NOTE: SSD0 slot supports M.2 2230 and M.2 2280 SSDs by default.</p> <p>NOTE: SSD1 slot supports M.2 2230 and M.2 2280 SSDs by default.</p> <p>NOTE: SSD2 slot supports only M.2 2280 SSDs by default.</p> |

Table 7. Internal slots

| Description | Values |
|-------------|--|
| |  NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support . |

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Precision 3680 Tower.




Table 8. Ethernet specifications

| Description | Values |
|---------------|------------------|
| Model number | Intel I219-LM |
| Transfer rate | 10/100/1000 Mbps |

Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules that are supported on your Precision 3680 Tower.

Table 9. Wireless module specifications

| Description | Option one | Option two |
|---------------------------|---|---|
| Model number | Intel AX211 | Qualcomm WCN6856-DBS |
| Transfer rate | 2400 Mbps | Up to 3571 Mbps |
| Frequency bands supported | 2.4 GHz/5 GHz/6 GHz  NOTE: The 6 GHz frequency is supported on computers that are installed with the Windows 11 operating system only. | 2.4 GHz/5 GHz/6 GHz  NOTE: The 6 GHz frequency is supported on computers that are installed with the Windows 11 operating system only. |
| Wireless standards | <ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax) | <ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax) |
| Encryption | <ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP | <ul style="list-style-type: none"> • 64-bit and 128-bit WEP • AES-CCMP • TKIP |
| Bluetooth wireless card | 5.3 | 5.3 |
| |  NOTE: The version of the Bluetooth wireless card may vary depending on the operating system that is installed on your computer. | |

Audio

The following table lists the audio specifications of your Precision 3680 Tower.

Table 10. Audio specifications

| Description | | Values |
|----------------------------|------------------------|---|
| Audio controller | | Realtek ALC3246-CG |
| Stereo conversion | | 24-bit DAC (Digital-to-Analog) and ADC (Analog-to-Digital) |
| Internal audio interface | | Intel HDA (high-definition audio) |
| External audio interface | | <ul style="list-style-type: none"> • Front: One Universal Audio port • Rear: One Audio line-out |
| Number of speakers | | One (optional) |
| Internal-speaker amplifier | | Integrated in ALC3246-CG (Class-D 2 W) |
| External volume controls | | Keyboard shortcut controls |
| Speaker output: | | |
| | Average speaker output | 2 W |
| | Peak speaker output | 2.2 W |
| Subwoofer output | | Not supported |
| Microphone | | Not supported |

Storage

This section lists the storage options on your Precision 3680 Tower.

- M.2 SSD Boot + Optional M.2 SSDs – This configuration enables boot on M.2 NVMe SSD with up to three additional NVMe SSDs. No SATA hard drive are configured in this option.
- M.2 SSD Boot + Optional M.2 SSD + 3.5-inch SATA hard drive + Optional 3.5-inch SATA hard drive – This configuration enables boot on M.2 NVMe SSD with up to three additional NVMe SSDs, one 3.5-inch SATA hard drive and one additional 3.5-inch SATA hard drive.
- M.2 SSD Boot + Optional SSDs + Front-accessible 3.5-inch SATA hard drive - This configuration enabled boot on M.2 NVMe SSD with up to three additional NVMe SSDs, one front-accessible 3.5-inch SATA hard drive + Two 3.5-inch SATA hard drive (internal)
- RAID 0/1/5 is available.

NOTE: M.2 NVMe SSD cannot build RAID disk with any SATA drive.

NOTE: Fourth NVMe SSD is supported by UltraSpeed Duo M.2 PCIe card.

NOTE: Precision 3680 Tower motherboard can support up to two M.2 2230 or up to three M.2 2280 NVMe SSDs.

Table 11. Storage specifications

| Storage type | Interface type | Capacity |
|--------------------------------|----------------|------------|
| 3.5-inch, 5400 RPM, hard drive | SATA 3.0 | 4 TB |
| 3.5-inch, 7200 RPM, hard drive | SATA 3.0 | Up to 2 TB |

Table 11. Storage specifications (continued)

| Storage type | Interface type | Capacity |
|--|---------------------------|------------|
| 3.5-inch, 7200 RPM, Enterprise hard drive (optional) | SATA 3.0 | Up to 8 TB |
| M.2 2230 SSD | Gen 4 PCIe NVMe, Class 35 | 256 GB |
| M.2 2280 SSD | Gen 4 PCIe NVMe, Class 40 | Up to 4 TB |
| M.2 2280 SSD Self-Encrypting | Gen 4 PCIe NVMe | Up to 1 TB |

Storage matrix

The following table lists the storage configurations that are supported on your Precision 3680 Tower.

Table 12. Storage matrix

| Configuration group | Storage | | | Bootable Device | 1st M.2 PCIe NVMe SSD CPU lane | 2nd M.2 PCIe NVMe SSD PCH lane | 3rd M.2 PCIe NVMe SSD PCH lane | CFI only 3rd NVMe SSD in QX118 slim line slot | Ultra-Speed NVMe SSD Zoom AIC | 3.5-inch hard drive | 3.5-inch hard drive | 3.5-inch hard drive | 3.5-inch hard drive | ODD | |
|---------------------|--|---------------|----------------------|-----------------|--------------------------------|--------------------------------|--------------------------------|---|-------------------------------|---------------------|---------------------|---------------------|---------------------|--------------|--|
| | PCIe lane connection and SSD location | | | | CPU Gen4 Slot 1 | PCH Gen4 Slot 2 | PCH Gen3 Slot 3 | PCH Gen3 Slot 3 | 5.25-inch front bay slimline | PCH Gen3 Slot 4 | | | | | |
| | QX118/ODD Physical Location | | | | | | | | | | | | | | |
| C1 | Internal M.2 SSD Boot (No SATA hard drive) | | | M.2 SSD | Y1 (boot) | Y2 (optional) | Y3 (optional) | N/A | Y4 (optional) | N/A | N/A | N/A | N/A | Y (optional) | |
| C1 | Internal M.2 SSD Boot (No SATA hard drive) | | | M.2 SSD | Y (boot) RAID 0 or 1 | RAID 0 or 1 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | Y (optional) | |
| C1 | Internal M.2 SSD Boot (No SATA hard drive) | | | M.2 SSD | Y (boot) RAID 0 or 5 | RAID 0 or 5 | RAID 0 or 5 | N/A | N/A | N/A | N/A | N/A | N/A | Y (optional) | |
| C1 | Internal M.2 SSD Boot (No SATA hard drive) | | | M.2 SSD | Y (boot) RAID 0 or 5 | RAID 0 or 5 | RAID 0 or 5 | N/A | RAID 0 or 5 | N/A | N/A | N/A | N/A | Y (optional) | |
| C1 | Internal M.2 SSD Boot (No SATA hard drive) | | | M.2 SSD | Y1 (boot) | Y2 (optional) | N/A | Y3 (optional) | Y4 (optional) | N/A | N/A | N/A | N/A | Y (optional) | |
| C2 | Internal M.2 SSD Boot | Optional SSDs | 3.5-inch hard drives | M.2 SSD | Y1 (boot) | Y2 (optional) | Y3 (optional) | N/A | Y4 (optional) | Y1 Bay 1 | Y2 (optional) Bay 2 | N/A | N/A | Y (optional) | |

Table 12. Storage matrix (continued)

| Configuration group | Storage | | | Bootable Device | 1st M.2 PCIe NVMe SSD CPU lane | 2nd M.2 PCIe NVMe SSD PCH lane | 3rd M.2 PCIe NVMe SSD PCH lane | CFI only 3rd NVMe SSD in QX118 slim line slot | Ultra-Speed NVMe SSD Zoom AIC | 3.5-inch hard drive | 3.5-inch hard drive | 3.5-inch hard drive | 3.5-inch hard drive | ODD |
|---------------------|---------------------------------------|---------------|--------------------------------------|-----------------|--------------------------------|--------------------------------|--------------------------------|---|-------------------------------|---------------------|---------------------|---------------------|---------------------|--------------|
| | PCIe lane connection and SSD location | | | | | | | PCH Gen3 Slot 3 | | | | | | |
| | QX118/ODD Physical Location | | | | CPU Gen4 Slot 1 | PCH Gen4 Slot 2 | PCH Gen3 Slot 3 | 5.25-inch front bay slimline | PCH Gen3 Slot 4 | | | | | |
| C2 | Internal M.2 SSD Boot | Optional SSDs | 3.5-inch hard drives | M.2 SSD | Y (boot) RAID 0 or 1 | RAID 0 or 1 | N/A | N/A | N/A | Y1 Bay 1 | Y2 (optional) Bay 2 | N/A | N/A | Y (optional) |
| C2 | Internal M.2 SSD Boot | Optional SSDs | 3.5-inch hard drives | M.2 SSD | Y (boot) RAID 0 or 5 | RAID 0 or 5 | RAID 0 or 5 | N/A | N/A | Y1 Bay 1 | Y2 (optional) Bay 2 | N/A | N/A | Y (optional) |
| C2 | Internal M.2 SSD Boot | Optional SSDs | 3.5-inch hard drives | M.2 SSD | Y1 (boot) | Y2 (optional) | N/A | Y3 (optional) | Y4 (optional) | Y1 Bay 1 | Y2 (optional) Bay 2 | N/A | N/A | Y (optional) |
| C2 | Internal M.2 SSD Boot | Optional SSDs | 3.5-inch hard drives | M.2 SSD | Y1 (boot) | Y2 (optional) | Y3 (optional) | N/A | Y4 (optional) | RAID 0 or 1 Bay 1 | RAID 0 or 1 Bay 2 | N/A | N/A | Y (optional) |
| C3 | Internal M.2 SSD Boot | Optional SSDs | Front removable 3.5-inch hard drives | M.2 SSD | Y1 (boot) | Y2 (optional) | Y3 (optional) | N/A | Y4 (optional) | Y2 (optional) Bay 1 | Y3 (optional) Bay 2 | N/A | Y1 Front Bay 3 | Y (optional) |
| C4 | No storage drive | | | None | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |

RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell Technologies recommends drive models that are identical.

NOTE: RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any I/O operations with block sizes larger than the stripe size splits the I/O and become constrained by the slowest of the drives. For RAID 0 I/O operations where block sizes are smaller than the stripe size, whichever drive the I/O operation targets determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations, and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all I/O operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the I/O operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random I/O operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all I/O types. One of the worst examples of constrained performance here is when using unbuffered I/O. To ensure that writes are fully committed to nonvolatile regions of the RAID volume, unbuffered I/O bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the I/O operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of I/O operation completely negates any advantage of a higher performing drive in the volume.

RAID 5 provides better performance by using data striping and protection through parity. The disadvantage of RAID 5 is that rebuilding a large RAID 5 volume requires a longer period of time. The following are the key features of RAID 5:

- Requires at least three drives.
- Data is available even if one of the drives present in the volume fails. The failed drive must be replaced, and the volume must be rebuilt for the data to be accessible.
- The total capacity is N-1, where N is the total capacity of the drives in the array. For example, if you use three 1 TB drives in a RAID 5 array, the total volume size is 2 TB.



Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have different performance characteristics for certain types of I/O operations. Thus, matching by model ensures that the RAID volume is comprised of a homogeneous array of drives that deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

Precision 3680 Tower supports RAID with more than one hard drive configuration.

Media-card reader

The following table lists the media cards that are supported on your Precision 3680 Tower.

Table 13. Media-card reader specifications

| Description | Values |
|---|---|
| Media-card type | One SD-card slot  NOTE: The SD-card reader maybe from different manufacturers and will require specific drivers to be installed. |
| Media-cards supported | <ul style="list-style-type: none"> • Secure Digital (SD) • Secure Digital High Capacity (SDHC) • Secure Digital Extended Capacity (SDXC) |
|  NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card that is installed on your computer. | |

Power ratings

The following table lists the power rating specifications of Precision 3680 Tower.

Table 14. Power ratings

| Description | Option one | Option two | Option three |
|-----------------|---|---|--|
| Type | 300 W Platinum internal power supply unit (80PLUS Platinum Certified) | 500 W Platinum internal power supply unit (80PLUS Platinum Certified) | 1000 W Platinum internal power supply unit (80PLUS Platinum Certified) |
| Input voltage | 90 VAC–264 VAC | 90 VAC–264 VAC | 90 VAC–264 VAC |
| Input frequency | 47 Hz–63 Hz | 47 Hz–63 Hz | 47 Hz–63 Hz |

Table 14. Power ratings (continued)

| Description | Option one | Option two | Option three |
|-----------------------------|---|--|--|
| Input current (maximum) | <ul style="list-style-type: none"> 4.2 A | <ul style="list-style-type: none"> 7 A | 13.6 A |
| Output current (continuous) | <ul style="list-style-type: none"> 12 VA/18 A 12 VB/18 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/3.3 A | <ul style="list-style-type: none"> 12 VA/18 A 12 VB/18 A 12 VC/18 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/3.3 A 12 VC/0 A | <ul style="list-style-type: none"> 12 VA/36 A 12 VB/27 A 12 VC/36 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/5 A 12 VC/0 A |
| Rated output voltage | <ul style="list-style-type: none"> 12 VA 12 VB | <ul style="list-style-type: none"> 12 VA 12 VB 12 VC | <ul style="list-style-type: none"> 12 VA 12 VB 12 VC |
| Temperature range: | | | |
| Operating | 5°C to 45°C (41°F to 113°F) | 5°C to 45°C (41°F to 113°F) | 5°C to 45°C (41°F to 113°F) |
| Storage | -40°C to 70°C (-40°F to 158°F) | -40°C to 70°C (-40°F to 158°F) | -40°C to 70°C (-40°F to 158°F) |

Power supply connector

The following table lists the Power supply connector specifications of your Precision 3680 Tower.

Table 15. Power supply connector

| Power supply unit | Connectors |
|--------------------------|---|
| 300W (80 PLUS Platinum) | <ul style="list-style-type: none"> Two 4-pin connectors for the processor One 8-pin connector for the system board |
| 500W (80 PLUS Platinum) | <ul style="list-style-type: none"> Two 4-pin connectors for the processor One 8-pin connector for the system board One 6-pin and one 2 + 6-pin connectors for graphic card |
| 1000W (80 PLUS Platinum) | <ul style="list-style-type: none"> Two 4-pin connectors for the processor One 8-pin connector for the system board Two 6-pin and two 2 + 6-pin connectors for the graphic card |

NOTE: This workstation uses high wattage power supply unit and has to be connected to a Power Distribution Unit (PDU) always for protection of equipment.

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Precision 3680 Tower.

Table 16. GPU—Integrated

| Controller | Memory size | Processor |
|------------------------|----------------------|--|
| Intel UHD Graphics 730 | Shared system memory | 14 th Gen Intel Core i3-14100 |

Table 16. GPU—Integrated (continued)

| Controller | Memory size | Processor |
|------------------------|----------------------|--|
| Intel UHD Graphics 770 | Shared system memory | 14 th Gen Intel Core i5-14500, i5-14600, i5-14600K, i7-14700, i7-14700K, i9-14900, and i9-14900K processors |

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 3680 Tower.

Table 17. Multiple display support matrix

| Description | Option one | Option two |
|--------------------------|--|--|
| Integrated Graphics Card | Intel UHD Graphics 730 | Intel UHD Graphics 770 |
| Optional Module | VGA, HDMI 2.0, DP++ 1.4a HBR3, USB 3.2 Gen 2 (10 Gbps) Type-C with DP-Alt mode | VGA, HDMI 2.0, DP++ 1.4a HBR3, USB 3.2 Gen 2 (10 Gbps) Type-C with DP-Alt mode |
| Supported 4K Displays | DP1.4a HBR2, 4096 x 2304 @60 Hz | DP1.4a HBR2, 4096 x 2304 @60 Hz |
| Supported 5K Displays | 5K tiled resolution (5120 x 2880) support on DP panels. <i>i</i> NOTE: Requires two DP cables that are driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism. | 5K tiled resolution (5120 x 2880) support on DP panels. <i>i</i> NOTE: Requires two DP cables that are driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism. |

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Precision 3680 Tower.

Table 18. GPU—Discrete

| Controller | Memory size | Memory type |
|--------------------------------|-------------|-------------|
| NVIDIA RTX 6000 Ada Generation | 48 GB | GDDR6 |
| NVIDIA RTX 5000 Ada Generation | 24 GB | GDDR6 |
| NVIDIA RTX 4500 Ada Generation | 24 GB | GDDR6 |
| NVIDIA RTX 4000 Ada Generation | 20 GB | GDDR6 |
| NVIDIA RTX 2000 Ada Generation | 12 GB | GDDR6 |
| NVIDIA T1000 | 8 GB | GDDR6 |
| NVIDIA T1000 | 4 GB | GDDR6 |
| NVIDIA T400 | 4 GB | GDDR6 |
| NVIDIA GeForce RTX 4090 | 24 GB | GDDR6X |
| NVIDIA GeForce RTX 4090D | 24 GB | GDDR6X |

Table 18. GPU—Discrete (continued)

| Controller | Memory size | Memory type |
|-------------------------------|-------------|-------------|
| NVIDIA GeForce RTX 4080 Super | 16 GB | GDDR6X |
| NVIDIA GeForce RTX 4070 | 12 GB | GDDR6 |
| NVIDIA GeForce RTX 4060 | 8 GB | GDDR6 |
| AMD Radeon Pro W7900 | 48 GB | GDDR6 |
| AMD Radeon Pro W7600 | 8 GB | GDDR6 |
| AMD Radeon Pro W7500 | 8 GB | GDDR6 |
| AMD Radeon Pro W6400 | 4 GB | GDDR6 |
| AMD Radeon Pro W6300 | 2 GB | GDDR6 |






Video port resolution

The following table lists the video port resolution for your Precision 3680 Tower.

Table 19. Video port resolution

| Graphics card | Video ports | Maximum supported resolution |
|--------------------------------|------------------------|--|
| NVIDIA RTX 6000 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires two DPs 1.4a and DSC <i>i</i> NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA RTX 5000 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires two DPs 1.4a and DSC <i>i</i> NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA RTX 4500 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires two DPs 1.4a and DSC <i>i</i> NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA RTX 4000 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires two DPs 1.4a and DSC <i>i</i> NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA RTX 2000 Ada Generation | Four mini-DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires two DPs 1.4a and DSC <i>i</i> NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA T1000 | Four mini-DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz <i>i</i> NOTE: Requires three DPs 1.4a and DSC |

Table 19. Video port resolution (continued)

| Graphics card | Video ports | Maximum supported resolution |
|-------------------------------|--|--|
| | |  NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA T1000 | Four mini-DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz  NOTE: Requires three DPs 1.4a and DSC  NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA T400 | Three mini-DP 1.4 ports | 7680 x 4320 @24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC  NOTE: DisplayPort 1.2 Certified, DisplayPort 1.3 and 1.4 ready |
| NVIDIA GeForce RTX 4090 | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1 port | 7680 x 4320 @60 Hz |
| NVIDIA GeForce RTX 4090D | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1 port | 7680 x 4320 @60 Hz |
| NVIDIA GeForce RTX 4080 Super | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1 port | 7680 x 4320 @60 Hz |
| NVIDIA GeForce RTX 4070 | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1 port | 7680 x 4320 @60 Hz |
| NVIDIA GeForce RTX 4060 | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1 port | 7680 x 4320 @60 Hz |
| AMD Radeon Pro W7900 | <ul style="list-style-type: none"> • Three DisplayPort 2.1 ports • One enhanced mini-DP 2.1 port | 7680 x 4320 @60 Hz |
| AMD Radeon Pro W7600 | Four DP 2.1 ports | 7680 x 4320 @60 Hz |
| AMD Radeon Pro W7500 | Four DP 2.1 ports | 7680 x 4320 @60 Hz |
| AMD Radeon Pro W6400 | Two DP 1.4 ports | 7680 x 4320 @60 Hz |
| AMD Radeon Pro W6300 | Two DP 1.4 ports | 7680 x 4320 @60 Hz |

Hardware security

The following table lists the hardware security of your Precision 3680 Tower.

Table 20. Hardware security


| Hardware security |
|--|
| Kensington security-cable slot |
| Padlock loop |
| Lockable cable cover (optional) |
| Lockable Bezel and Key for Front Accessible SATA hard drive (optional)  NOTE: Included with front-accessible storage configurations |

Table 20. Hardware security (continued)

| Hardware security |
|--|
| Chassis intrusion switch |
| Trusted Platform Module TPM 2.0 (FIPs 140-2 certificate) |
| Intel Integrated TPM |

Environmental

The following table lists the environmental specifications of your Precision 3680 Tower.

Table 21. Environmental

| Feature | Values |
|--|---------------------|
| Recyclable packaging | Yes |
| BFR/PVC—free | No |
| Vertical orientation packaging support | Yes |
| MultiPack packaging | Yes (Except Brazil) |
| Energy-Efficient Power Supply | Standard |
| ENV0424 compliant | Yes |

i **NOTE:** Wood-based fiber packaging contains a minimum of 35% recycled content by total weight of wood-based fiber. Packaging that contains without wood-based fiber can be claimed as Not Applicable. The anticipated required criteria for EPEAT 2018.

Regulatory compliance

The following table lists the regulatory compliance of your Precision 3680 Tower.

Table 22. Regulatory compliance

| Regulatory compliance |
|--|
| Product Safety, EMC and Environmental Datasheets |
| Dell Regulatory Compliance Home page |
| Responsible Business Alliance Policy |

Operating and storage environment


This table lists the operating and storage specifications of your Precision 3680 Tower.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 23. Computer environment

| Description | Operating | Storage |
|-------------------|-----------------------|--------------------------|
| Temperature range | 10°C-35°C (50°F-95°F) | -40°C-65°C (-40°F-149°F) |

Table 23. Computer environment (continued)

| Description | Operating | Storage |
|--|--|---|
| Relative humidity (maximum) | 20% to 85% (non-condensing) (non-condensing, Max dew point temperature = 26°C) | 0% to 95% (non-condensing) 5% to 95% (non-condensing, Max dew point temperature = 33°C) |
| Vibration (maximum)* | 0.52 GRMS random at 5 Hz-350 Hz | 2.0 GRMS random at 5 Hz-500 Hz |
| Shock (maximum) | 40G Bottom half-sine pulse (2.5 ms) | 105G half-sine pulse (2.5 ms) |
| Altitude range | -15.2 m to 3048 m (4.64 ft to 10,000 ft) | -15.2 m to 10,668 m (4.64 ft to 35,000 ft) |
|  CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. | | |

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Engineering specifications

Physical system dimensions

The following table provides the physical dimensions of your Precision 3680 Tower.

NOTE: System weight and shipping weight are based on a typical configuration and may vary based on your system configuration. A typical configuration includes integrated graphics, one hard drive, and one optical drive.

Table 24. Physical system dimensions

| Feature | Values |
|--|--|
| Chassis volume | 26.80 L |
| Chassis Weight | <ul style="list-style-type: none"> • Minimum: 7.58 kg (16.71 lb) • Maximum: 16.05 kg (35.38 lb) |
| Chassis dimensions | |
| Height | 372.90 mm (14.68 in.) |
| Width | 173.00 mm (6.81 in.) |
| Depth | 420.20 mm (16.54 in.) |
| Shipping Weight (includes packaging materials) | <ul style="list-style-type: none"> • Minimum: 10.29 kg (22.68 lb) • Maximum: 18.86 kg (41.57 lb) |
| Packaging dimensions | |
| Height | 546 mm (21.50 in.) |
| Width | 492 mm (19.37 in.) |
| Depth | 359 mm (14.13 in.) |

Add-in card dimensions

System board connector maximum add-in card allowable dimensions

Table 25. System board connector maximum add-in card allowable dimensions

| Feature | Values |
|---------------------------|---|
| M.2 connector | <ul style="list-style-type: none"> • Two M.2 2230/2280 PCIe Gen4 x4 • One M.2 2280 PCIe Gen3 x4 |
| Voltage | 3.3 V |
| Power | 11.55W |
| PCIe x16 connector | One PCIe x16 slot |
| Voltage | 3.3 V/12 V |

Table 25. System board connector maximum add-in card allowable dimensions (continued)

| Feature | Values |
|--------------------------|---|
| Height | 4.37 in. (111.15 mm) |
| Length | <ul style="list-style-type: none"> 12.28 in. (312 mm) (without an extender) 12.36 in. (314 mm) (with an extender) |
| Maximum wattage | <ul style="list-style-type: none"> 75W/300W PSU 225W/500W PSU 450W/1000W PSU |
| PCIe x4 connector | <ul style="list-style-type: none"> One PCIe Gen3 x4 Closed-end One PCIe Gen4 x4 Open end |
| Voltage | 3.3 V/12 V |
| Height | 4.37 in. (111.15 mm) |
| Length | <ul style="list-style-type: none"> Slot 1: 6.60 in. (167.65 mm) Slot 4: 12.28 in. (312 mm) (without an extender) Slot 4: 12.36 in. (314 mm) (with an extender) |
| Maximum wattage | PCIe Gen3 x4 Closed-end <ul style="list-style-type: none"> 10W for 300W/500W/1000W PSU PCIe Gen4 x4 Open end <ul style="list-style-type: none"> 25W/300W PSU 25W*/500W PSU (up to 125W if total slots <=250W) Blocked by 450W graphics card/1000W PSU (up to 125W if total slots <= 460W) |

PCIe lane details

Table 26. PCIe lane details

| Expansion Slot Type | Voltage | Maximum Height | Maximum Length | Maximum Wattage | Cards supported |
|---------------------|------------|----------------------|-----------------------|--|-----------------|
| PCIe x16 connector | 3.3 V/12 V | 110.98 mm (4.37 in.) | 266.70 mm (10.50 in.) | <ul style="list-style-type: none"> 75W/300W PSU 225W/500W PSU 450W/1000W PSU | Yes |
| PCIe x4 connector | 3.3 V/12 V | 111.25 mm (4.38 in.) | 167.64 mm (6.60 in.) | Slot 1 <ul style="list-style-type: none"> 10W for 300W/500W/1000W PSU Slot 4 <ul style="list-style-type: none"> 25W/300W PSU 25W*/500W PSU (up to 125W if total slots <=250W) Blocked by 450W graphics card | Yes |

PCIe add-in cards

Serial port PCIe card, Low Profile

Table 27. Serial port PCIe card, Low Profile

| Feature | Values |
|----------------------------------|--|
| Interface | <ul style="list-style-type: none"> RS-232 IEEE1284 |
| Data rates | <ul style="list-style-type: none"> 50 bps ~115.2 Kbps (serial) maximum 1.8 Mbps (parallel) |
| Controller details | |
| Controller | SUNIX SUN2212 (16C950 UART compatible) |
| Controller bus architecture | <ul style="list-style-type: none"> PCI Express 2.0 Single-Lane (x1) |
| Driver support | Windows 10 (64-bit) |
| Half-height serial add-in dongle | Optional |
| Environment | |
| Operating temperature | 0°C to 60°C (32°F–140°F) |
| Operating humidity | 5% to 95% RH |
| Storage temperature | -20°C to 85°C (-4°F to 185°F) |

UltraSpeed Duo M.2 PCIe card

The following table lists the UltraSpeed Duo M.2 PCIe card specifications, also known as Zoom 2 card.

Table 28. UltraSpeed Duo M.2 PCIe card (Zoom 2 card) specifications

| Feature | Values |
|-----------------------|-------------------------------|
| Interface | PCIe |
| Data rates | PCIe Gen 4 |
| Environment | |
| Operating temperature | 0°C to 60°C (32°F to 140°F) |
| Operating humidity | 5% to 95% RH |
| Storage temperature | -20°C to 70°C (-4°F to 158°F) |

Thunderbolt 4 PCIe Add-In Card

The following table lists the Thunderbolt 4 PCIe Add-In Card specifications.

Table 29. Thunderbolt 4 PCIe Add-In Card

| Features | Values |
|-----------------|--|
| Design | LP HL PWA with PCIe 4.0 x4 Full height Bracket option |
| Number of ports | <ul style="list-style-type: none"> 2x Type-C I/O 2x DP input |

Table 29. Thunderbolt 4 PCIe Add-In Card (continued)

| Features | Values |
|----------------|---|
| | <ul style="list-style-type: none"> GPIO (requires side-band cable) |
| Feature | <ul style="list-style-type: none"> 40 Gb/s (2x 20) with TB4 and USB 4.0 Auto switch/shift to Legacy TB/USB (support backwards compatibility) DP1.4a HBR3 Out (DP-MF and DP-alt) two streams DP Tunnel 32 Gb/s 2 Streams, USB3.0 Tunnel 10 Gb/s Hub Support, TB Networking, Universal Cable |
| Power | <ul style="list-style-type: none"> Upper Port - 5 V@3 A (TB + Power Delivery Icon) Lower Port - 5 V@1.5 A (TB Icon Only) |
| Drivers | <ul style="list-style-type: none"> Windows 10 and Windows 11 Red Hat Enterprise Linux Ubuntu |
| Cables | <ul style="list-style-type: none"> 1x Sideband cable (system to TBT4 card) 2x DP cables x24 cm Graphics loopback (DP connector from GFX card to TBT4 card) |
| Manuals | <ul style="list-style-type: none"> Product Specification Sheet and User Guide Online Post Drivers and Docs |
| Certificates | <ul style="list-style-type: none"> Intel Thunderbolt Validation WHQL USB 4.0 40 Gb/s |
| Specifications | <ul style="list-style-type: none"> Dell standard reliability Behavior Materials |

Dust Filter

This topic illustrates the optional dust filter attachments for the Precision 3680 Tower.

Dust Filter

Table 30. Dust filter specifications

| Feature | Value |
|----------------------|--------|
| Mesh count (cm/inch) | 40/100 |
| Weave | PW |
| Silk diameter (cm) | 0.0055 |
| Open area (%) | 80 |
| Thickness (cm) | 0.01 |
| Remark | PET |

Ethernet

Intel Ethernet Connection i219-LM

The following table lists the i219-LM specifications.

Table 31. Intel Ethernet Connection i219-LM specifications

| Feature | Values |
|---|---|
| External connector type | RJ45 |
| Data rate | 10/100/1000 Mbps |
| Controller Details | |
| Controller bus architecture | PCI Express base specification revision 1.1 |
| Integrated memory | Yes |
| Data transfer mode | Yes (Bus-Master DMA) |
| Power consumption (Full operation per data rate connection speed) | 542 mW (Max) |
| Power consumption (Standby operation) | 76 mW (Max) |
| IEEE standards compliance | 802.3 |
| Hardware certifications | N/A |
| Boot ROM support | EEPROM (Located in SPI) |
| Network Transfer Mode | |
| Network transfer rate | 10 Mb (full/half-duplex) |
| 10BASE-T (full-duplex) 20 Mbps | 100 Mb (full/half-duplex) |
| 100BASE-TX (half-duplex) 100 Mbps | 1000 Mb (full-duplex) |
| Environmental | |
| Operating temperature range | 0°C–85°C (32°F–185°F) |
| Operating humidity | 20% to 80% (non condensing) |
| Operating system driver Support | <ul style="list-style-type: none"> ● Windows (x64) ● Ubuntu ● Neokylin |
| Manageability | <ul style="list-style-type: none"> ● Wakeup On LAN ● PXE 2.1 |
| Management capabilities alerting | Optional Intel Standard Manageability (must be made at time of purchase). |

This term does not connote an actual operating speed of 1 Gb/sec. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Intel Ethernet Connection i226

The following table lists the i226 specifications.

Table 32. Intel Ethernet Connection i226 specifications

| Feature | Values |
|-----------------------------|--|
| External connector type | RJ45 |
| Data rate | 10/100/1000/2500 Mbps |
| Adapter Features | |
| Bus Type/Bus Width | PCI Express 3.1 x 1 |
| Interrupt levels | INTA, MSI, MSI-X |
| Hardware certifications | FCC B, UL, CE, VCCI, BSMI, CTICK, KCC |
| Controller | Intel Ethernet Controller I226 |
| Bracket | Full-height bracket installed. |
| Wake-on-LAN | Supported |
| Power Consumption | |
| Link Speed/Traffic | Typical power |
| 10 Mbps | 0.5W |
| 100 Mbps | 0.6W |
| 1 Gbe | 0.9W |
| 2.5 Gbe | 1.4W |
| Environmental | |
| Operating temperature range | 0°C–55°C (32°F–131°F) |
| Storage temperature range | -40°C–70°C (-40°F–158°F) |
| Storage humidity | Maximum 90% non-condensing relative humidity at 35°C |
| Physical Dimensions | |
| Dimensions | 68.70 mm x 65.30 mm |

Wireless module

Intel AX211, 2x2 MIMO, 2400 Mbps, 2.4/5/6 GHz, Wi-Fi 6E (WiFi 802.11ax), Bluetooth 5.3

The following table lists the Intel AX211 specifications.


 **NOTE:** Wi-Fi 6 is supported in regions where Wi-Fi 6E is unavailable.

Table 33. Intel AX211 specifications

| Description | Specifications |
|------------------|--|
| Host interface | CNVio |
| Network standard | IEEE 802.11a/b/g/n/ac/ax, 160 MHz channel use, MU-MIMO, new 6 GHz band |

Table 33. Intel AX211 specifications (continued)


| Description | Specifications |
|-------------------------------------|--|
| Wi-Fi Alliance certifications | Wi-Fi CERTIFIED 6, Wi-Fi CERTIFIED a/b/g/n/ac,WMM, WMM-Power Save, WPA2, WPA3, WPS, PMF,Wi-Fi Direct, Wi-Fi Agile Multiband  NOTE: Other names and brands may be claimed as the property of others. |
| Operating frequency bands | <ul style="list-style-type: none"> ● 2.4 GHz ● 5 GHz ● 6 GHz |
| Data rate | <ul style="list-style-type: none"> ● 2.4 GHz 40M: Up to 574 Mbps ● 5/6 GHz 80M: Up to 1.2 Gbps ● 5/6 GHz 160M: Up to 2.4 Gbps |
| Power consumption | Optimized power modes (sleep states) reduce power consumption during periods of inactivity |
| Security methods | <ul style="list-style-type: none"> ● WPA2 Personal and Enterprise ● WPA3 |
| Authentication protocols | <ul style="list-style-type: none"> ● 802.1X EAP-TLS ● EAP-TTLS/MSCHAPv2 ● PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA) |
| Encryption | <ul style="list-style-type: none"> ● 64-bit and 128-bit WEP ● TKIP ● 128-bit AES-CCMP ● 256-bit AES-GCMP |
| Product safety | <ul style="list-style-type: none"> ● UL ● C-UL ● CB (IEC60950-1) |
| Management capabilities alerting | Support for Intel AMT |
| Government compliance | <ul style="list-style-type: none"> ● FIPS 140-2 ● FISMA |
| Client utility | Intel PRO/Set wireless software v22 and later |
| Antenna diversity | Supported |
| Radio On/Off | Supported |
| Roaming | Support seamless roaming between access points |
| Wake on wireless | Supported |
| Wireless display | Native Miracast support by Windows |
| Wireless PAN standard | <ul style="list-style-type: none"> ● Dual Mode Bluetooth 5.3 ● BLE |
| Bluetooth data rates | Up to 3 Mbps |
| Bluetooth operating frequency bands | 2.4 GHz |
| Bluetooth profiles supported | Support for Microsoft Inbox Bluetooth Wireless Card profiles in Windows |
| Bluetooth data encryption | 128-bit encryption |
| Bluetooth output power | Power class 1 |

Table 33. Intel AX211 specifications (continued)

| Description | Specifications |
|-----------------------|--|
| Operating temperature | 0°C to + 50°C (Full performance at shield temperatures up to 80°C) |
| Storage temperature | -40°C to +70°C |
| Humidity | Up to 90% RH non-condensing (at temperatures of 25°C to 35°C) |

Qualcomm WCN6856, 2x2, Wi-Fi 6E DBS, Bluetooth 5.3

The following table lists the Intel Qualcomm WCN6856 specifications.

Table 34. Qualcomm WCN6856 specifications

| Description | Specifications |
|-------------------------------|---|
| Host interface | <ul style="list-style-type: none"> • Wi-Fi - PCIe • Bluetooth - USB |
| Network standard | IEEE 802.11a/b/g/n/ac/ax, 160MHz channel use, MU-MIMO |
| Wi-Fi Alliance certifications | <ul style="list-style-type: none"> • 802.11 a/b/g/n/ac R2/ax R2 • WMM • WMM-PS • WPA3 • WPS2 • PMF • WFD • Miracast • Passpoint R2 • Voice Personal |
| Operating frequency bands | <ul style="list-style-type: none"> • 2.4 GHz • 5 GHz • 6 GHz |
| Data rate | <ul style="list-style-type: none"> • 2.4 GHz 40M: Up to 691 Mbps • 5 GHz 160M: Up to 2.88 Gbps • 6 GHz 160M: Up to 2.88 Gbps • DBS mode • 2.4 GHz 40M + 5/6 GHz 160M: Up to 3.57 Gbps |
| Power consumption | Optimized power modes (sleep states) reduce power consumption during periods of inactivity |
| Authentication | <ul style="list-style-type: none"> • WPA and WPA2 Personal and Enterprise • WPA3 Personal and Enterprise |
| Authentication protocols | <ul style="list-style-type: none"> • 802.1X EAP-TLS • EAP-TTLS/MSCHAPv2 • PEAPv0-MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA) |
| Encryption | <ul style="list-style-type: none"> • 64-bit and 128-bit WEP • TKIP • 128-bit AES-CCMP • 256-bit AES-GCMP |
| Product safety | <ul style="list-style-type: none"> • UL • C-UL |

Table 34. Qualcomm WCN6856 specifications (continued)

| Description | Specifications |
|-------------------------------------|--|
| | <ul style="list-style-type: none"> • CB (IEC60950-1) |
| Government compliance | <ul style="list-style-type: none"> • FIPS 140-2 • FISMA |
| Client utility | Intel PRO/Set wireless software v22 and later |
| Antenna diversity | Supported |
| Radio On/Off | Supported |
| Roaming | Support seamless roaming between access points |
| Wake on wireless | Supported |
| Wireless display | Native Miracast support by Windows |
| Wireless PAN standard | <ul style="list-style-type: none"> • Dual Mode Bluetooth 5.3 • BLE |
| Bluetooth data rates | Up to 3 Mbps |
| Bluetooth operating frequency bands | 2.4 GHz |
| Bluetooth profiles supported | Support for Microsoft Inbox Bluetooth profiles in Windows |
| Bluetooth data encryption | 128-bit encryption |
| Bluetooth output power | Power Class 1 |
| Operating temperature | 0°C to + 50°C (Full performance at shield temperatures up to 80°C) |
| Storage temperature | -40°C to +70°C |
| Humidity | Up to 90% RH non-condensing (at temperatures of 25° C to 35° C) |

GPU—Integrated

Intel UHD Graphics 730

Table 35. Intel UHD Graphics 730 specifications

| Intel UHD Graphics 730 | |
|---|--|
| Bus Type | Integrated |
| Memory Type | UMA |
| Graphics Level | i3: GT1 (UHD) |
| Overlay Planes | Yes |
| Operating Systems Graphics/ Video API Support | DirectX 12, OpenGL (4.6) |
| Supports maximum resolution | <ul style="list-style-type: none"> • On board integrated DP1.4 (HBR2)(4096 x 2304 @ 60 Hz) • Option card with VGA (1920 x 1200 @ 60 Hz) • Option card with DP1.4 (HBR3) (5120 x 3200 @ 60 Hz), (7680 x 4320 @ 60 Hz HDR with discrete graphics) |

Table 35. Intel UHD Graphics 730 specifications (continued)

| Intel UHD Graphics 730 | | |
|------------------------------|------------|--|
| | | <ul style="list-style-type: none"> Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) Option card with Type-C (5120 x 3200 @ 60 Hz), (7680 x 4320 @ 60 Hz HDR with discrete graphics) |
| Number of displays supported | | Up to four displays are supported |
| Multiple Display Supports | 2 displays | <ul style="list-style-type: none"> On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4 (4096x2304 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with VGA (1920 x 1200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with DP1.4 (5120 x 3200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with Type-C (5120 x 3200 @ 60 Hz) |
| | 3 displays | <ul style="list-style-type: none"> On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with VGA (1920 x 1200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) + Option card with DP1.4 (5120 x 3200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) + Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with Type-C (5120 x 3200 @ 60 Hz) |
| External connectors | | <ul style="list-style-type: none"> Two system-board integrated DP1.4 HBR2 + One video option (VGA/DP1.4 HBR3/HDMI2.0/USB 3.2 Gen 2 type-C Alt-mode) |

Intel UHD Graphics 770

Table 36. Intel UHD Graphics 770 specifications

| Intel UHD Graphics 770 | |
|---|---|
| Bus Type | Integrated |
| Memory Type | UMA |
| Graphics Level | i5/i7/i9: GT1 (UHD) |
| Overlay Planes | Yes |
| Operating Systems Graphics/ Video API Support | DirectX 12, OpenGL (4.6) |
| Supports maximum resolution | <ul style="list-style-type: none"> On board integrated DP1.4 (HBR2)(4096 x 2304 @ 60 Hz) Option card with VGA (1920 x 1200 @ 60 Hz) Option card with DP1.4 (HBR3) (5120 x 3200 @ 60 Hz), (7680 x 4320 @ 60 Hz HDR with discrete graphics) Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) Option card with Type-C (5120 x 3200 @ 60 Hz), (7680 x 4320 @ 60 Hz HDR with discrete graphics) |
| Number of displays supported | Up to four displays are supported |
| Multiple Display Supports | 2 displays <ul style="list-style-type: none"> On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with VGA (1920 x 1200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with DP1.4 (5120 x 3200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + Option card with Type-C (5120 x 3200 @ 60 Hz) |
| | 3 displays <ul style="list-style-type: none"> On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) + Option card with VGA (1920 x 1200 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) + Option card |

Table 36. Intel UHD Graphics 770 specifications (continued)

| Intel UHD Graphics 770 | | |
|------------------------|--|---|
| | | with DP1.4 (5120 x 3200 @ 60 Hz) <ul style="list-style-type: none"> On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4(4096 x 2304 @ 60 Hz) + Option card with HDMI 2.0 (4096 x 2160 @ 60 Hz) On board integrated DP1.4 (4096 x 2304 @ 60 Hz) + On board integrated DP1.4 (4096 x 2160 @ 30 Hz)+ Option card with Type-C (5120 x 3200 @ 60 Hz) |
| External connectors | | Two system-board integrated DP1.4 HBR2 + One video option (VGA/DP1.4 HBR3/ HDMI2.0/USB 3.2 Gen 2 type-C Alt-mode) |

GPU—Discrete

NVIDIA RTX 6000 Ada Generation, 48 GB GDDR6

The following table lists the NVIDIA RTX 6000 Ada Generation specifications.

Table 37. NVIDIA RTX 6000 Ada Generation specifications

| Description | Values |
|---------------------------|---|
| GPU Memory | 48 GB GDDR6 |
| Memory Interface | 384-bit |
| Memory Bandwidth | 960 GB/s |
| NVIDIA CUDA Cores | 18176 |
| System Interface | PCI Express 4.0 x16 |
| Max Power Consumption | 300 W |
| Thermal Solution | Active |
| Form Factor | Height: 4.37 in./111.15 mm/Length: 10.58 in./268.60 mm, Dual Slot |
| Display Connectors | 4x DP 1.4a |
| Max Simultaneous Displays | 4 direct, 4 DP 1.4a Multi-Stream |
| Display Resolution | <ul style="list-style-type: none"> 2x 7680 x 4320 @ 60 Hz 4x 5120 x 2880 @ 60 Hz 4x 4096 x 2160 @ 120 Hz |
| Graphics APIs | <ul style="list-style-type: none"> Shader Model 6.6 OpenGL 4.6 DirectX 12 Vulkan 1.3 |

Table 37. NVIDIA RTX 6000 Ada Generation specifications (continued)

| Description | Values |
|--------------|--|
| Compute APIs | <ul style="list-style-type: none"> • CUDA 11.6 • DirectCompute • OpenCL 3.0 |

NVIDIA RTX 5000 Ada Generation, 24 GB GDDR6

The following table lists the NVIDIA RTX 5000 Ada Generation specifications.

Table 38. NVIDIA RTX 5000 Ada specifications

| Description | Values |
|---------------------------|---|
| GPU Memory | 24 GB GDDR6 |
| Memory Interface | 256-bit |
| Memory Bandwidth | 576 GB/s |
| NVIDIA CUDA Cores | 12800 |
| System Interface | PCI Express 4.0 x16 |
| Max Power Consumption | 250 W |
| Thermal Solution | Active |
| Form Factor | Height: 4.37 in./111.15 mm/Length: 10.58 in./268.60 mm, Dual Slot |
| Display Connectors | 4x DP 1.4a |
| Max Simultaneous Displays | 4 direct, 4 DP 1.4a Multi-Stream |
| Display Resolution | <ul style="list-style-type: none"> • 2x 7680 x 4320 @ 60 Hz • 4x 5120 x 2880 @ 60 Hz • 4x 4096 x 2160 @ 120 Hz |
| Graphics APIs | <ul style="list-style-type: none"> • Shader Model 6.7 • OpenGL 4.6 • DirectX 12 • Vulkan 1.3 |
| Compute APIs | <ul style="list-style-type: none"> • CUDA 12.2 • DirectCompute • OpenCL 3.0 |

NVIDIA RTX 4500 Ada Generation, 24 GB GDDR6

The following table lists the NVIDIA RTX 4500 Ada Generation specifications.

Table 39. NVIDIA RTX 4500 Ada specifications

| Description | Values |
|-------------------|---------------------|
| GPU Memory | 24 GB GDDR6 |
| Memory Interface | 192-bit |
| Memory Bandwidth | 432 GB/s |
| NVIDIA CUDA Cores | 7680 |
| System Interface | PCI Express 4.0 x16 |

Table 39. NVIDIA RTX 4500 Ada specifications (continued)

| Description | Values |
|---------------------------|---|
| Max Power Consumption | 210 W |
| Thermal Solution | Active |
| Form Factor | Height: 4.37 in./111.15 mm/Length: 10.58 in./268.60 mm, Dual Slot |
| Display Connectors | 4x DP 1.4a |
| Max Simultaneous Displays | 4 direct, 4 DP 1.4 Multi-Stream |
| Display Resolution | <ul style="list-style-type: none"> ● 2x 7680 x 4320 @ 60 Hz ● 4x 5120 x 2880 @ 60 Hz ● 4x 4096 x 2160 @ 120 Hz |
| Graphics APIs | <ul style="list-style-type: none"> ● Shader Model 6.7 ● OpenGL 4.6 ● DirectX 12 ● Vulkan 1.3 |
| Compute APIs | <ul style="list-style-type: none"> ● CUDA 12.2 ● DirectCompute ● OpenCL 3.0 |

NVIDIA RTX 4000 Ada Generation, 20 GB GDDR6

The following table lists the NVIDIA RTX 4000 Ada Generation specifications.

Table 40. NVIDIA RTX 4000 Ada Generation specifications

| Description | Values |
|---------------------------|---|
| GPU Memory | 20 GB GDDR6 |
| Memory Interface | 160-bit |
| Memory Bandwidth | 360 GB/s |
| NVIDIA CUDA Cores | 6144 |
| System Interface | PCI Express 4.0 x16 |
| Max Power Consumption | 130 W |
| Thermal Solution | Active |
| Form Factor | Height: 4.39 in./111.75 mm and Length: 9.58 in./243.15 mm, Single Slot |
| Display Connectors | 4x DP 1.4a |
| Max Simultaneous Displays | 4 direct, 4 DP 1.4 Multi-Stream |
| Display Resolution | <ul style="list-style-type: none"> ● 2x 7680 x 4320 @ 60 Hz ● 4x 5120 x 2880 @ 60 Hz ● 4x 4096 x 2160 @ 120 Hz |
| Graphics APIs | <ul style="list-style-type: none"> ● Shader Model 6.7 ● OpenGL 4.6 ● DirectX 12 ● Vulkan 1.3 |
| Compute APIs | <ul style="list-style-type: none"> ● CUDA 12.2 ● DirectCompute ● OpenCL 3.0 |

NVIDIA RTX 2000 Ada Generation, 12 GB, GDDR6

The following table lists the NVIDIA RTX 2000 Ada Generation specifications.

Table 41. NVIDIA RTX 2000 Ada Generation specifications

| Description | Values |
|---------------------------|---|
| GPU Memory | 12 GB GDDR6 |
| Memory Interface | 160-bit |
| Memory Bandwidth | 256 GB/s |
| NVIDIA CUDA Cores | 3072 |
| System Interface | PCI Express 4.0 x16 |
| Max Power Consumption | 00 W |
| Thermal Solution | Active |
| Form Factor | Height: 4.39 in./111.75 mm and Length: 9.58 in./243.15 mm, Single Slot |
| Display Connectors | 4x DP 1.4a |
| Max Simultaneous Displays | 4 direct, 4 DP 1.4 Multi-Stream |
| Display Resolution | <ul style="list-style-type: none"> ● 2x 7680 x 4320 @ 60 Hz ● 4x 5120 x 2880 @ 60 Hz ● 4x 4096 x 2160 @ 120 Hz |
| Graphics APIs | <ul style="list-style-type: none"> ● Shader Model 6.7 ● OpenGL 4.6 ● DirectX 12 ● Vulkan 1.3 |
| Compute APIs | <ul style="list-style-type: none"> ● CUDA 12.2 ● DirectCompute ● OpenCL 3.0 |

NVIDIA T1000, 8 GB GDDR6

The following table lists the NVIDIA T1000 specifications.

Table 42. NVIDIA T1000 specifications

| Feature | Values |
|-------------------------------|---|
| GPU frequency | 1065 MHz |
| DirectX 12 | 12 |
| Shader model | 5.17 |
| Open CL | 3 |
| Open GL | 4.6 |
| GPU memory interface | 128 bits |
| PCIe bus | PCIe 3.0 x16 |
| Display support | Four mini-DP 1.2 Certified, 1.3/1.4 Ready |
| Graphics memory configuration | 8 GB, GDDR6 |
| Graphics memory clock speed | 5001 MHz |

Table 42. NVIDIA T1000 specifications (continued)

| Feature | Values |
|---------------------|--|
| Active fan sink | 4-pin embedded fan controller |
| Slot number | Single Slot |
| PCB form factor | Half Height |
| PCB layer | N/A |
| PCB solder mask | N/A |
| Bracket form factor | Low Profile or Full Height |
| Maximum resolution | 7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a and DSC) |
| Power consumption | 50 W |

NVIDIA T1000, 8 GB GDDR6

The following table lists the NVIDIA T1000 specifications.

Table 43. NVIDIA T1000 specifications

| Feature | Values |
|-------------------------------|--|
| GPU frequency | 1065 MHz |
| DirectX 12 | 12 |
| Shader model | 5.17 |
| Open CL | 3 |
| Open GL | 4.6 |
| GPU memory interface | 128 bits |
| PCIe bus | PCIe 3.0 x16 |
| Display support | Four mini-DP 1.2 Certified, 1.3/1.4 Ready |
| Graphics memory configuration | 4 GB, GDDR6 |
| Graphics memory clock speed | 1250 MHz |
| Active fan sink | 4-pin embedded fan controller |
| Slot number | Single Slot |
| PCB form factor | Half Height |
| PCB layer | N/A |
| PCB solder mask | N/A |
| Bracket form factor | Low Profile or Full Height |
| Maximum resolution | 7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a and DSC) |
| Power consumption | 50 W |

NVIDIA T400, 4 GB GDDR6

The following table lists the NVIDIA T400 specifications.

Table 44. NVIDIA T400 specifications

| Feature | Values |
|-------------------------------|--|
| GPU frequency | 420 MHz |
| DirectX 12 | 12 |
| Shader model | 5.17 |
| Open CL | 3 |
| Open GL | 4.6 |
| GPU memory interface | 64 bits |
| PCIe bus | PCIe 3.0 x16 |
| Display support | Three mini-DP 1.2 Certified, 1.3/1.4 Ready |
| Graphics memory configuration | 4 GB, GDDR6 |
| Graphics memory clock speed | 5001 MHz |
| Active fan sink | 4-pin embedded fan controller |
| Slot number | Single Slot |
| PCB form factor | Half Height |
| PCB layer | N/A |
| PCB solder mask | N/A |
| Bracket form factor | Low Profile |
| Maximum resolution | 7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a and DSC) |
| Power consumption | 30 W |

NVIDIA GeForce RTX 4090, 24 GB, GDDR6

The following table lists the NVIDIA GeForce RTX 4090 specifications.

Table 45. NVIDIA GeForce RTX 4090 specifications

| Feature | Values |
|-------------------------------|--|
| GPU frequency | 2230 MHz (base clock) |
| DirectX 12 | 12 |
| Shader model | 6.7 |
| Open CL | 3.0 |
| Open GL | 4.6 |
| GPU memory interface | 384-bit |
| PCIe bus | PCIe 4.0 x 16 |
| Display support | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1a port |
| Graphics memory configuration | 24 GB, GDDR6X |

Table 45. NVIDIA GeForce RTX 4090 specifications (continued)

| Feature | Values |
|-----------------------------|--------------------------------------|
| Graphics memory clock speed | 21 Gbps |
| Active fan sink | Fan Controller Embedded (4-pin) |
| Slot number | 3 |
| PCB form factor | Full Height |
| PCB layer | 14 layer |
| Bracket form factor | Triple |
| Maximum resolution | 4K @ 120 Hz or 8K @ 60 Hz (with DSC) |
| Power consumption | 450 W |

NVIDIA GeForce RTX 4090D, 24 GB, GDDR6

The following table lists the NVIDIA GeForce RTX 4090D specifications.

Table 46. NVIDIA GeForce RTX 4090D specifications

| Feature | Values |
|-------------------------------|--|
| GPU frequency | 2230 MHz (base clock) |
| DirectX 12 | 12 |
| Shader model | 6.7 |
| Open CL | 3.0 |
| Open GL | 4.6 |
| GPU memory interface | 384-bit |
| PCIe bus | PCIe 4.0 x 16 |
| Display support | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1a port |
| Graphics memory configuration | 24 GB, GDDR6X |
| Graphics memory clock speed | 21 Gbps |
| Active fan sink | Fan Controller Embedded (4-pin) |
| Slot number | 3 |
| PCB form factor | Full Height |
| PCB layer | 14 layer |
| Bracket form factor | Triple |
| Maximum resolution | 4K @ 120 Hz or 8K @ 60 Hz (with DSC) |
| Power consumption | 450 W |

NVIDIA GeForce RTX 4080 Super, 16 GB, GDDR6X

The following table lists the NVIDIA GeForce RTX 4080 Super specifications.

Table 47. NVIDIA GeForce RTX 4080 Super specifications

| Feature | Values |
|-------------------------------|---|
| GPU frequency | 2210 MHz (base clock) |
| DirectX 12 | 12 |
| Shader model | 6.7 |
| Open CL | 3.0 |
| Open GL | 4.6 |
| GPU memory interface | 256-bit |
| PCIe bus | PCIe 4.0 x 16 |
| Display support | <ul style="list-style-type: none">• Three DisplayPort 1.4a ports• One HDMI 2.1a port |
| Graphics memory configuration | 16 GB, GDDR6X |
| Graphics memory clock speed | 21 Gbps |
| Active fan sink | Fan Controller Embedded (4-pin) |
| Slot number | 3 |
| PCB form factor | Full Height |
| PCB layer | 14 layer |
| Bracket form factor | Triple |
| Maximum resolution | 4K @ 120 Hz or 8K @ 60 Hz (with DSC) |
| Power consumption | 320 W |

NVIDIA GeForce RTX 4070, 12 GB, GDDR6

The following table lists the NVIDIA GeForce RTX 4070 specifications.

Table 48. NVIDIA GeForce RTX 4070 specifications

| Feature | Values |
|-------------------------------|---|
| GPU frequency | 1920 MHz (base clock) |
| DirectX 12 | 12 |
| Shader model | 6.7 |
| Open CL | 3.0 |
| Open GL | 4.6 |
| GPU memory interface | 192-bit |
| PCIe bus | PCIe 4.0 x 16 |
| Display support | <ul style="list-style-type: none">• Three DisplayPort 1.4a ports• One HDMI 2.1a port |
| Graphics memory configuration | 12 GB, GDDR6 |
| Graphics memory clock speed | 21 Gbps |

Table 48. NVIDIA GeForce RTX 4070 specifications (continued)

| Feature | Values |
|---------------------|--------------------------------------|
| Active fan sink | Fan Controller Embedded (4-pin) |
| Slot number | 3 |
| PCB form factor | Full Height |
| PCB layer | 14 layer |
| Bracket form factor | Triple |
| Maximum resolution | 4K @ 120 Hz or 8K @ 60 Hz (with DSC) |
| Power consumption | 200 W |

NVIDIA GeForce RTX 4060, 8 GB GDDR6

The following table lists the NVIDIA GeForce RTX 4060 specifications.

Table 49. NVIDIA GeForce RTX 4060 specifications

| Feature | Values |
|-------------------------------|--|
| GPU frequency | 1830 MHz (base clock) |
| DirectX 12 | 12 |
| Shader model | 6.7 |
| Open CL | 3.0 |
| Open GL | 4.6 |
| GPU memory interface | 128-bit |
| PCIe bus | PCIe 4.0 x 16 |
| Display support | <ul style="list-style-type: none"> • Three DisplayPort 1.4a ports • One HDMI 2.1a port |
| Graphics memory configuration | 8 GB, GDDR6 |
| Graphics memory clock speed | 21 Gbps |
| Active fan sink | Fan Controller Embedded (4-pin) |
| Slot number | 3 |
| PCB form factor | Full Height |
| PCB layer | 14 layer |
| Bracket form factor | Triple |
| Maximum resolution | 4K @120 Hz or 8K @ 60 Hz (with DSC) |
| Power consumption | 115 W |

AMD Radeon Pro W7900, 48 GB GDDR6

The following table lists the AMD Radeon Pro W7900 specifications.

Table 50. AMD Radeon Pro W7900 specifications

| Feature | Values |
|---------------|-----------------------|
| GPU frequency | 1855 MHz (base clock) |

Table 50. AMD Radeon Pro W7900 specifications (continued)

| Feature | Values |
|-------------------------------|---|
| DirectX 12 | 12.0 Ultimate |
| Shader model | 6.7 |
| Open CL | 2.1 |
| Open GL | 4.6 |
| GPU memory interface | 384-bit |
| PCIe bus | Gen 4 (x8 lanes) |
| Display support | <ul style="list-style-type: none"> • 3x DP 2.1 • Enhanced mini-DP 2.1 |
| Graphics memory configuration | 48 GB DDR6 |
| Graphics memory clock speed | 2250 MHz |
| Active fan sink | Fan Controller Embedded (4 pin) |
| Slot number | Single slot |
| PCB form factor | Full Height, Three-Quarter Length |
| PCB layer | 8 |
| PCB solder mask | Matte Black |
| Bracket form factor | Full Height |
| Maximum resolution | 7680 x 4320 @ 60 Hz |
| Power consumption | 295 W |

AMD Radeon Pro W7600, 8 GB GDDR6

The following table lists the AMD Radeon Pro W7600 specifications.

Table 51. AMD Radeon Pro W7600 specifications

| Feature | Values |
|-------------------------------|-----------------------------------|
| GPU frequency | 1240 MHz (base clock) |
| DirectX 12 | 12.0 Ultimate |
| Shader model | 6.7 |
| Open CL | 2.2 |
| Open GL | 4.6 |
| GPU memory interface | 128-bit |
| PCIe bus | Gen 4 (x8 lanes) |
| Display support | x4 DP 2.1 |
| Graphics memory configuration | 8 GB DDR6 |
| Graphics memory clock speed | 2250 MHz |
| Active fan sink | Fan Controller Embedded (4 pin) |
| Slot number | Single slot |
| PCB form factor | Full Height, Three-Quarter Length |
| PCB layer | 8 |

Table 51. AMD Radeon Pro W7600 specifications (continued)

| Feature | Values |
|---------------------|---------------------|
| PCB solder mask | Matte Black |
| Bracket form factor | Full Height |
| Maximum resolution | 7680 x 4320 @ 60 Hz |
| Power consumption | 130 W |

AMD Radeon Pro W7500, 8 GB GDDR6

The following table lists the AMD Radeon Pro W7500 specifications.

Table 52. AMD Radeon Pro W7500 specifications

| Feature | Values |
|-------------------------------|-----------------------------------|
| GPU frequency | 540 MHz (base clock) |
| DirectX 12 | 12.0 Ultimate |
| Shader model | 6.7 |
| Open CL | 2.2 |
| Open GL | 4.6 |
| GPU memory interface | 128-bit |
| PCIe bus | Gen 4 (x8 lanes) |
| Display support | x4 DP 2.1 |
| Graphics memory configuration | 8 GB DDR6 |
| Graphics memory clock speed | 1350 MHz |
| Active fan sink | Fan Controller Embedded (4 pin) |
| Slot number | Single slot |
| PCB form factor | Full Height, Three-Quarter Length |
| PCB layer | 8 |
| PCB solder mask | Matte black |
| Bracket form factor | Full Height |
| Maximum resolution | 7680 x 4320 @ 60 Hz |
| Power consumption | 70 W |

AMD Radeon Pro W6400, 4 GB GDDR6

The following table lists the AMD Radeon Pro W6400 specifications.

Table 53. AMD Radeon Pro W6400 specifications

| Feature | Values |
|---------------|-----------------------|
| GPU frequency | 1923 MHz (base clock) |
| DirectX 12 | 12.0 Ultimate |
| Shader model | 6.6 |
| Open CL | 2.2 |

Table 53. AMD Radeon Pro W6400 specifications (continued)

| Feature | Values |
|-------------------------------|--------------------------------|
| Open GL | 4.6 |
| GPU memory interface | 64-bit |
| PCIe bus | Gen 4 (x4 lanes) |
| Display support | x2 DP 1.4 |
| Graphics memory configuration | 4 GB DDR6 |
| Graphics memory clock speed | 14 Gbps |
| Active fan sink | Fan Controller Embedded(4 pin) |
| Slot number | Single slot |
| PCB form factor | Full Height, Full length |
| PCB layer | 6 |
| PCB solder mask | Black |
| Bracket form factor | Full Height |
| Maximum resolution | 7680 x 4320 @ 60 Hz |
| Power consumption | 50 W |

AMD Radeon Pro W6300, 2 GB GDDR6

The following table lists the AMD Radeon Pro W6300 specifications.

Table 54. AMD Radeon Pro W6300 specifications

| Feature | Values |
|-------------------------------|---------------------------------|
| GPU frequency | 1096 MHz (base clock) |
| DirectX 12 | 12.0 Ultimate |
| Shader model | 6.1 |
| Open CL | 2.2 |
| Open GL | 4.6 |
| GPU memory interface | 32-bit |
| PCIe bus | Gen 4 (x4 lanes) |
| Display support | x2 DP 1.4 |
| Graphics memory configuration | 2 GB DDR6 |
| Graphics memory clock speed | 16 Gbps |
| Active fan sink | Fan Controller Embedded (4 pin) |
| Slot number | Single slot |
| PCB form factor | Full Height, Half Length |
| PCB layer | 6 |
| PCB solder mask | Red |
| Bracket form factor | Full Height |
| Maximum resolution | 7680 x 4320 @60 Hz |
| Power consumption | 35 W |

GPU and PSU matrix

The following table provides the GPU and PSU matrix of your Precision 3680 Tower.

Table 55. GPU and PSU matrix

| Graphics card | Card length | Weight (kg) | Power connector | I/O connector | Single/Dual/ Triple wide | PSU |
|--------------------------------|-------------|-------------|-----------------|--|--------------------------|---|
| NVIDIA RTX 6000 Ada Generation | 10.50 in. | 1.15 | Two 8-pins | Four DisplayPort 1.4a ports | Dual | 1000W |
| NVIDIA RTX 5000 Ada Generation | 10.50 in. | 1.18 | 8-pin | Four DisplayPort 1.4a ports | Dual | 1000W |
| NVIDIA RTX 4500 Ada Generation | 8.50 in. | 0.395 | 6-pin | Four DisplayPort 1.4a ports | Dual | <ul style="list-style-type: none"> ● 500W ● 1000W |
| NVIDIA RTX 4000 Ada Generation | 9.50 in. | 0.50 | 6-pin | Four DisplayPort 1.4a ports | Single | <ul style="list-style-type: none"> ● 500W ● 1000W |
| NVIDIA T1000 | 6.13 in. | 0.174 | N/A | Four mini-DP 1.2 ports | Single | <ul style="list-style-type: none"> ● 300W ● 500W ● 1000W |
| NVIDIA T1000 | 6.13 in. | 0.132 | N/A | Four mini-DP 1.2 ports | Single | <ul style="list-style-type: none"> ● 300W ● 500W ● 1000W |
| NVIDIA T400 | 6.13 in. | 0.123 | N/A | Three mini-DP 1.2 ports | Single | <ul style="list-style-type: none"> ● 300W ● 500W ● 1000W |
| NVIDIA GeForce RTX 4090 | 12.28 in. | 1.63 | 16-pin | <ul style="list-style-type: none"> ● Three DisplayPort 1.4a ports ● One HDMI 2.1a port | Triple | 1000W |
| NVIDIA GeForce RTX 4080 | 8.50 in. | 0.395 | 16-pin | <ul style="list-style-type: none"> ● Three DisplayPort 1.4a ports ● One HDMI 2.1a port | Triple | 1000W |
| NVIDIA GeForce RTX 4070 | 8.50 in. | 0.395 | 8-pin | <ul style="list-style-type: none"> ● Three DisplayPort 1.4a ports ● One HDMI 2.1a port | Dual | 1000W |
| NVIDIA GeForce RTX 4060 | 8.50 in. | 0.395 | 8-pin | <ul style="list-style-type: none"> ● Three DisplayPort 1.4a ports ● One HDMI 2.1a port | Dual | <ul style="list-style-type: none"> ● 500W ● 1000W |
| AMD Radeon Pro W7900 | 8.50 in. | 0.395 | 8-pin | <ul style="list-style-type: none"> ● Three DisplayPort 2.1 ports ● One enhanced mini-DP 2.1 port | Triple | 1000W |
| AMD Radeon Pro W7600 | 9.50 in. | 0.621 | 6-pin | Four DisplayPort 2.1 ports | Single | <ul style="list-style-type: none"> ● 500W ● 1000W |
| AMD Radeon Pro W7500 | 8.50 in. | 0.395 | N/A | Four DisplayPort 2.1 ports | Single | <ul style="list-style-type: none"> ● 500W ● 1000W |
| AMD Radeon Pro W6400 | 6.60 in. | 0.162 | N/A | Two DisplayPort 1.4 ports | Single | <ul style="list-style-type: none"> ● 300W ● 500W |

Table 55. GPU and PSU matrix (continued)

| Graphics card | Card length | Weight (kg) | Power connector | I/O connector | Single/Dual/Triple wide | PSU |
|----------------------|-------------|-------------|-----------------|---------------------------|-------------------------|---|
| | | | | | | <ul style="list-style-type: none"> 1000W |
| AMD Radeon Pro W6300 | 6.0 in. | 0.14 | N/A | Two DisplayPort 1.4 ports | Single | <ul style="list-style-type: none"> 300W 500W 1000W |

Video port and resolution matrix

The following table lists the Video port and resolution matrix on your Precision 3680 Tower.

Table 56. Video port and resolution matrix

| Port type | DP++ 1.4/HDCP 2.3 port (UMA and Discrete Graphics) | HDMI-OUT port—HDMI 1.4a (UMA Graphics) | HDMI-OUT port—HDMI 2.1 (Discrete Graphics) |
|-----------------------------------|--|--|--|
| Maximum resolution—single display | 4096 x 2304 @ 60 Hz | 4096 x 2160 @ 30 Hz | 4096 x 2160 @ 60 Hz |
| Maximum resolution—dual MST | 4096 x 2304 @ 60 Hz, 1400 x 1050 @ 60 Hz or 2880 x 1800 @ 60 Hz, 2880 x 1800 @ 60 Hz | Not applicable | Not applicable |
| Maximum resolution—triple MST | 4096 x 2304 @ 60 Hz, 1360 x 768 @ 60 Hz, 640 x 480 @ 60 Hz or 2304 x 1440 @ 60 Hz, 2304 x 1440 @ 60 Hz | Not applicable | Not applicable |
| Maximum resolution—quad MST | 4096 x 2304 @ 60 Hz, 4096 x 2304 @ 60 Hz, 1360 x 768 @ 60 Hz, 640 x 480 @ 60 Hz or 2304 x 1440 @ 60 Hz, 2304 x 1440 @ 60 Hz, 2304 x 1440 @ 60 Hz | Not applicable | Not applicable |

Hard-disk drive Preloaded bracket matrix

The following table lists the hard drive preloaded bracket information of your Precision 3680 Tower.

Table 57. Hard-disk drive Preloaded bracket matrix

| Hard-disk drive Preloaded bracket | Available |
|-----------------------------------|-----------|
| 3.5-inch Caddy or Bracket | Yes |
| 2.5-inch Caddy or Bracket | No |

Storage

3.5-inch, 1 TB, 7200 RPM, SATA, HDD

Table 58. 3.5-inch, 1 TB, 7200 RPM, SATA, HDD specifications

| Description | Values |
|----------------------|---------------------|
| Capacity | 1 TB |
| Speed | 7200 RPM |
| Height (approximate) | 26.10 mm (1.02 in.) |

Table 58. 3.5-inch, 1 TB, 7200 RPM, SATA, HDD specifications (continued)

| Description | Values |
|--|---|
| Width (approximate) | 147.06 mm (5.79 in.) |
| Depth (approximate) | 101.60 mm (4.00 in.) |
| Interface | SATA 3.0 |
| Speed (maximum) | Up to 6 Gbps |
| MTBF | 550,000 hours |
| Logical blocks | 1,953,525,168 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> ● Idle: 5 W ● Active: 10 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 5°C to 60°C |
| Relative humidity range | 5% to 90% |
| Op shock | 65G @2ms |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% |

3.5-inch, 2 TB, 7200 RPM, SATA, HDD

Table 59. 3.5-inch, 2 TB, 7200 RPM, SATA, HDD specifications

| Description | Values |
|--|---|
| Capacity | 2 TB |
| Speed | 7200 RPM |
| Height (approximate) | 25.40 mm (1.00 in.) |
| Width (approximate) | 147.06 mm (5.79 in.) |
| Depth (approximate) | 101.60 mm (4.00 in.) |
| Interface | SATA 3.0 |
| Speed (maximum) | Up to 6 Gbps |
| MTBF | 550,000 hours |
| Logical blocks | 3,907,029,168 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> ● Idle: 5 W ● Active: 10 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 5°C to 60°C |
| Relative humidity range | 5% to 90% |
| Op shock | 65G @2ms |
| Environmental non-operating conditions (non-condensing) | |

Table 59. 3.5-inch, 2 TB, 7200 RPM, SATA, HDD specifications (continued)

| Description | Values |
|-------------------------|---------------|
| Temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% |

3.5-inch, 4 TB, 5400 RPM, SATA, HDD

Table 60. 3.5-inch, 4 TB, 5400 RPM, SATA, HDD specifications

| | |
|--|---|
| Capacity | 4 TB |
| Speed | 5400 RPM |
| Height (approximate) | 25.40 mm (1.00 in.) |
| Width (approximate) | 147.06 mm (5.79 in.) |
| Depth (approximate) | 101.60 mm (4.00 in.) |
| Interface | SATA 3.0 |
| Speed (maximum) | Up to 6 Gbps |
| MTBF | 550,000 hours |
| Logical blocks | 7,814,037,168 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 5°C to 60°C |
| Relative humidity range | 5% to 90% |
| Op shock | 65G @2ms |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% |

3.5-inch, 4 TB, 7200 RPM, SATA, Enterprise HDD

Table 61. 3.5-inch, 4 TB, 7200 RPM, SATA, Enterprise HDD specifications

| | |
|----------------------|----------------------|
| Capacity | 4 TB |
| Speed | 7200 RPM |
| Height (approximate) | 25.40 mm (1.00 in.) |
| Width (approximate) | 147.06 mm (5.79 in.) |
| Depth (approximate) | 101.60 mm (4.00 in.) |
| Interface | SATA 3.0 |
| Speed (maximum) | Up to 6 Gbps |
| MTBF | 550,000 hours |
| Logical blocks | 3,907,029,168 |

Table 61. 3.5-inch, 4 TB, 7200 RPM, SATA, Enterprise HDD specifications (continued)

| | |
|--|---|
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 5°C to 60°C |
| Relative humidity range | 5% to 90% |
| Op shock | 65G @2ms |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% |

3.5-inch, 8 TB, 7200 RPM, SATA, Enterprise HDD

Table 62. 3.5-inch, 8 TB, 7200 RPM, SATA, Enterprise HDD specifications

| | |
|--|---|
| Capacity | 8 TB |
| Speed | 7200 RPM |
| Height (approximate) | 25.40 mm (1.00 in.) |
| Width (approximate) | 147.06 mm (5.79 in.) |
| Depth (approximate) | 101.60 mm (4.00 in.) |
| Interface | SATA 3.0 |
| Speed (maximum) | Up to 6 Gbps |
| MTBF | 550,000 hours |
| Logical blocks | 3,907,029,168 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 5°C to 60°C |
| Relative humidity range | 5% to 90% |
| Op shock | 65G @2ms |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% |

M.2 2230, 256 GB, TLC PCIe NVMe Gen 4, Class 35 SSD

The following table lists the M.2 2230, 256 GB SSD specifications.

Table 63. 256 GB SSD specifications

| Description | Values |
|-------------|--------|
| Capacity | 256 GB |

Table 63. 256 GB SSD specifications (continued)

| Description | Values |
|--|--|
| Height (approximate) | 3.50 mm (0.13 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 30 mm (1.18 in.) |
| Interface type | PCIe Gen 4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTTF | 1.4M hours |
| Logical blocks | 500,118,192 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> ● Idle: 5 mW (PS4) ● Active: 4W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 512 GB SSD specifications.

Table 64. 512 GB SSD specifications

| Description | Values |
|--|--|
| Capacity | 512 GB |
| Height (approximate) | 2.38 mm (0.17 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 1,000,215,216 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> ● Idle: 5 mW (PS4 - L1.2) ● Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |

Table 64. 512 GB SSD specifications (continued)

| Description | Values |
|--|---------------|
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 1 TB SSD specifications.

Table 65. 1 TB SSD specifications

| Description | Values |
|--|--|
| Capacity | 1 TB |
| Height (approximate) | 2.38 mm (0.17 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 2,000,409,264 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> Idle: 5 mW (PS4 - L1.2) Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 2 TB SSD specifications.

Table 66. 2 TB SSD specifications

| Description | Values |
|----------------------|--------------------|
| Capacity | 2 TB |
| Height (approximate) | 2.38 mm (0.09 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |

Table 66. 2 TB SSD specifications (continued)

| Description | Values |
|--|--|
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 4,000,797,360 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 4 TB SSD specifications.

Table 67. 4 TB SSD specifications

| Description | Values |
|--|--|
| Capacity | 4 TB |
| Height (approximate) | 3.73 mm (0.15 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 8,001,573,552 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Opal Self-Encrypting Class 40 SSD

The following table lists the M.2 2280, 512 GB SSD, self-encrypting drive specifications.

Table 68. 512 GB SSD, self-encrypting drive specifications

| Description | Values |
|--|---|
| Capacity | 512 GB |
| Height (approximate) | 2.38 mm (0.09 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 1,000,215,216 |
| Power source | |
| Power consumption (reference only) | <ul style="list-style-type: none"> Idle: 5 mW (PS4 - L12) Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Opal Self-Encrypting Class 40 SSD

The following table lists the M.2 2280, 1 TB SSD, self-encrypting drive specifications.

Table 69. 1 TB SSD, self-encrypting drive specifications

| Description | Values |
|----------------------|-------------------------|
| Capacity | 1 TB |
| Height (approximate) | 2.38 mm (0.09 in.) |
| Width (approximate) | 22 mm (0.87 in.) |
| Depth (approximate) | 80 mm (3.15 in.) |
| Interface type | PCIe Gen4 |
| Speed (maximum) | 64 Gb/s (up to 4 lanes) |
| MTBF | 1.4M hours |
| Logical blocks | 2,000,409,264 |
| Power source | |

Table 69. 1 TB SSD, self-encrypting drive specifications (continued)

| Description | Values |
|--|---|
| Power consumption (reference only) | <ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L12) • Active: 5 W |
| Environmental operating conditions (non-condensing) | |
| Temperature range | 0°C to 70°C |
| Relative humidity range | 10% to 90% |
| Op shock | 1500G |
| Environmental non-operating conditions (non-condensing) | |
| Temperature range | -40°C to 70°C |
| Relative humidity range | 5% to 95% |

8x DVD±RW, slimline

Table 70. 8x DVD±RW, slimline specifications

| | |
|--|----------------------|
| Height (without bezel) | 9.50 mm (0.37 in.) |
| Width (without bezel) | 128.00 mm (5.04 in.) |
| Depth (without bezel) | 126.01 mm (4.97 in.) |
| Weight (maximum) | 140 grams |
| Interface | SATA 1.5 |
| Speed (maximum) | Up to 1.5 Gbps |
| Disc capacity | Standard |
| Internal buffer size | 0.5 MB |
| Access times (typical) | Supplier dependent |
| Maximum data transfer rates | |
| Writes | 8x DVD/ 24x CD |
| Reads | 8x DVD/ 24x CD |
| Power source | |
| DC power requirements | 5 V |
| DC current | 1300 mA |
| Environmental operating conditions (non-condensing) | |
| Operating temperature range | 5°C to 60°C |
| Relative humidity range | 10% to 90% RH |
| Maximum wet bulb temperature | 29°C |
| Altitude range | 0 m to 3048 m |
| Environmental non-operating conditions (non-condensing) | |
| Operating temperature range | -40°C to 65°C |
| Relative humidity range | 5% to 95% RH |
| Maximum wet bulb temperature | 38°C |
| Altitude range | 0 m to 10600 m |

Media-card reader

The following table lists the media-card reader specifications on your Precision 3680 Tower.

Table 71. Media-card reader (standard offering)

| Media supported (Maximum capacity that is supported will vary by Flash Media Types) | |
|--|---|
| Media Supported | SDXC, SDHC, SD Secure Digital (SD) 4.0 UHS-II Secure Digital (SD) 3.0 UHS-I |
| Support Specification Versions | Secure Digital (SD) 4.0 |
| Power source | |
| Max Power Requirements | 1.2 A |
| Supply Voltage Range | 3.3 V |
| Power Consumption | MS 0.08 mA |
| Environmental operating conditions (Non-condensing) | |
| Operating Temperature Range | 0°C to 70°C |
| Relative Humidity Range | N/A |
| Environmental non-operating conditions (Non-condensing) | |
| Operating Temperature Range | N/A |
| Relative Humidity Range | N/A |

NOTE: Systems may be shipped with media-card reader from Realtek or Genesys. If manually installing the Operating System, the appropriate driver must be installed.

Power supply unit

Table 72. Power supply unit specifications

| Description | Values | | |
|-----------------------------------|--|--|--|
| | 300 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) | 500 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) | 1000 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) |
| Type | 300 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) | 500 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) | 1000 W (internal power supply unit, 92% Efficient PSU, 80 Plus Platinum) |
| Input voltage | 90 VAC to 264 VAC | 90 VAC to 264 VAC | 90 VAC to 264 VAC |
| Input frequency | 47 Hz to 63 Hz | 47 Hz to 63 Hz | 47 Hz to 63 Hz |
| Input current (maximum) | <ul style="list-style-type: none"> 4.2 A @ 90 V AC 2.1 A @ 180 V AC | <ul style="list-style-type: none"> 7 A @ 90 V AC 3.5 A @ 180 V AC | <ul style="list-style-type: none"> 13.6 A @ 90 V AC 12 A-6 A @ 100-240 V AC |
| Output current (continuous) | <ul style="list-style-type: none"> 12 VA1/18 A 12 VA2/18 A 12 VB/18 A | <ul style="list-style-type: none"> 12 VA1/18 A 12 VA2/18 A 12 VB/18 A 12 VC/18 A | <ul style="list-style-type: none"> 12 VA/36 A 12 VB/27 A 12 VC/36 A |
| Rated output voltage | <ul style="list-style-type: none"> 12 VA1 12 VA2 12 VB | <ul style="list-style-type: none"> 12 VA1 12 VA2 12 VB 12 VC | <ul style="list-style-type: none"> 12 VA 12 VB 12 VC |
| BTUs/h (based on PSU max wattage) | 1023 BTU/h | 1705 BTU/h | 3410 BTU/h |

Table 72. Power supply unit specifications (continued)

| Description | Values | | |
|--|--------------------------------|--------------------------------|--------------------------------|
| Temperature range | | | |
| Operating | 5°C to 50°C (41°F to 122°F) | 5°C to 50°C (41°F to 122°F) | 5°C to 50°C (41°F to 122°F) |
| Storage | -40°C to 70°C (-40°F to 158°F) | -40°C to 70°C (-40°F to 158°F) | -40°C to 70°C (-40°F to 158°F) |
| Compliance | | | |
| Erp Lot6 Tier 2 requirement | Yes | Yes | Yes |
| 80Plus compliant | Yes | Yes | Yes |
| Energy Star 8.0 compliant | Yes | Yes | Yes |
| GS mark compliant | Yes | Yes | Yes |
| NCTC Anti Power Surge certification | Yes | Yes | Yes |
| NCTC Anti Lightning Strike certification | Yes | Yes | Yes |

Thermal dissipation

The following table lists the thermal dissipation of your Precision 3680 Tower.

Table 73. Thermal dissipation

| Power supply unit | Heat dissipation | Voltage |
|-------------------------|------------------------------|--|
| 300W (80Plus Platinum) | $300 * 3.412 = 818$ BTU/hr | 100 to 240 VAC, 47 to 63 Hz, 10.0 A/ 16.5 A |
| 500W (80Plus Platinum) | $500 * 3.412 = 1706$ BTU/hr | 100 to 240 VAC, 47 to 63 Hz, 16.0 A/ 18.0 A |
| 1000W (80Plus Platinum) | $1000 * 3.412 = 1706$ BTU/hr | 100 to 240 VAC, 47 to 63 Hz, 16.0 A/ 18.0 A/20.0 A |

CMOS battery

The following table lists the CMOS battery specifications of your Precision 3680 Tower.

Table 74. CMOS battery

| Brand | Type | Voltage | Composition | Battery life |
|-------------------------------|--------|---------|---------------|--|
| SHUNWO, DOUBLE BEST, VIC-DAWN | CR2032 | 3.0 V | Lithium metal | Continuous Discharge Under 15 kΩ Load to 2.0 V End-Voltage. 20°C±2°C 940 Hrs. or Longer.910 Hrs.or Longer after 12 mo. |

Accessories

The following table lists the supported accessories on your Precision 3680 Tower.

Table 75. Accessories

| Accessories |
|--|
| 3Dconnexion SpaceMouse Wireless - 3DX-700066 |
| Dell Slim Soundbar - SB521A |
| Dell Pro Wireless ANC Headset - WL7022 |
| Dell UltraSharp Webcam - WB7022 |
| Dell Webcam - WB3023 |
| Dell 27 Monitor - P2723D |
| Dell Pro Wireless Keyboard and Mouse - KM5221W |
| Precision Tower Cable Cover |

Security

Software security

The following table lists the software security details of your Precision 3680 Tower.

Table 76. Software security

| |
|---|
| McAfee Small Business Security 30-Day Free Trial |
| McAfee Small Business Security 12-month Subscription |
| McAfee Small Business Security 36-month Subscription |
| Security software per software functional plan/cycle list |
| Dell Data Protection Personal Edition (DDP E PE) or Dell Encryption Personal (Future Name) |
| Dell Data Protection Enterprise Edition (DDP E EE) or Dell Encryption Enterprise (Future Name) |
| Dell Data Protection External Media Edition (DDP E EME) or Dell Encryption External Media (Future Name) |
| Data Leakage Protection (DLP) or Dell Data Guardian (new name) |
| Dell Data Protection BitLocker Manager (DDP BLM) |
| VMware Airwatch |
| Dell Data Protection Endpoint Security Suite or Dell Endpoint Security Suite Pro |
| Dell Data Protection Endpoint Security Suite Enterprise or Dell Endpoint Security Suite Enterprise |
| Mozy (Cloud Backup) |
| Dell Threat Defense |
| RSA SecurID |
| RSA NetWitness Endpoint |
| Absolute Data and Device Security |

Table 76. Software security (continued)

| |
|---|
| D-Pedigree (Secure Supply Chain Functionality) |
| Microsoft Windows BitLocker Manager |
| Support for Encryption SED hard drives (Opal FIPS and non-FIPS, SATA, PCIe) |
| Support eDRIVE Storage including RAID |
| Support UEFI-Preboot Authentication (PBA) solution for Windows 10 |
| Local hard drive data wipe via BIOS ("Secure Erase") |
| BIOS Administrative Password |
| BIOS Password |
| BIOS hard drive password option (default off) |
| Windows 10 Device Guard and Credential Guard |
| BIOS Data Port On/Off - Data Port disablement |
| Intel Secure Boot (TXT + TPM) - Launch control policy |
| Intel's Identity Protection (IPT) |
| Intel Guard Technologies and Secure Key |
| Secure update of pre-boot password(s) via remote BIOS update |

Trusted Platform Module

The following table lists the Trusted Platform Module (TPM) of your Precision 3680 Tower.

Table 77. Trusted Platform Module (TPM)

| |
|----------------------------------|
| TPM: Nuvoton NPCT760JABYX |
| SPI interface |
| TPM 2.0 |
| FIPs 140-2 certificate |

Mil-SPEC

The Precision 3680 Tower meets military specifications for the following MIL-STD 810H tests:

Table 78. Military specifications

| Test Category | Test Method | Test Parameters |
|-------------------------------------|---------------------------|--|
| Non-operating altitude test | Method 500.6 Procedure I | Test specification: <ul style="list-style-type: none">● Altitude: 15,000 ft● Temperature: 21°C● Duration: 1 hour |
| Operating altitude test | Method 500.6 Procedure II | Test specification: <ul style="list-style-type: none">● Altitude: 15,000 ft● Temperature: 21°C● Duration: 1 hour |
| Non-operating high temperature test | Method 501.7 Procedure I | Test specification: <ul style="list-style-type: none">● Temperature: 33°C - 71°C |

Table 78. Military specifications (continued)

| Test Category | Test Method | Test Parameters |
|--|---------------------------------------|--|
| | | <ul style="list-style-type: none"> ● High temperature cycles, climatic category A1 - Hot dry ● Duration: 168 hours constant |
| Operating high temperature test | Method 501.7 Procedure II | Test specification: <ul style="list-style-type: none"> ● Temperature: 32°C - 49°C ● High temperature cycles ● Duration: 120 hours constant |
| Non-operating low temperature test | Method 502.7 Procedure I - Storage | Test specification: <ul style="list-style-type: none"> ● Temperature: -51°C ● Duration: 24 hours |
| Operating low temperature test | Method 502.7 Procedure II - Operation | Test specification: <ul style="list-style-type: none"> ● Temperature: -29°C ● Duration: 24 hours |
| Humidity test | Method 507.6 Procedure I | Induced B3 <ul style="list-style-type: none"> ● Duration: Hot-humid, 15 days exposure Induced B3, Non-operating |
| Mechanical shock test - I Bench handling | Method 516.8 Procedure VI | Test specification: <ul style="list-style-type: none"> ● The lifted edge of the chassis has been raised 100 mm (4 in.) above the horizontal bench top. |
| Blowing dust test | Method 510.7 Procedure I | Test specification: <ul style="list-style-type: none"> ● Temperature: 25°C and 60°C ● Dust concentration: (10.6±7) g/m³ ● Air flow velocity: 1.5 m/s to 8.9 m/s ● Relative humidity: 30% ● Duration: 12 hours |
| Operating vibration test | Method 514.8 Procedure I | Refer table 514.6C-II: Category 4 - common carrier |
| Shock material to be packaged non-operating | Method 516.8 Procedure II | Test specification: <ul style="list-style-type: none"> ● Pulse shape: Trapezoidal ● Acceleration: 30 g ● Velocity change: 304 inch/second ● Shock direction: 6 faces (±X, ±Y, ±Z axes) ● No. of shock: 1 shock/ face (total 6 shocks) |
| Crash hazard shock test Non-operating | Method 516.8 Procedure V | Test specification: <ul style="list-style-type: none"> ● Pulse shape: Half-sine ● Acceleration: 185 g ● Pulse duration: 2 ms ● Shock direction: 12 faces (±X, ±Y, ±Z axes) ● No. of shock: 1 shock/ face (total 12 shocks) |

Acoustic noise emission information tower

The following table lists the acoustic noise emission information of your Precision 3680 Tower.

Table 79. Precision 3680 Tower with 14th Generation Intel Core i9-14900K vPro processor/32 GB memory/8 TB hard drive

| Component | Test Configuration |
|--------------------------|---|
| CPU | 14 th Generation Intel Core i9-14900K vPro |
| Memory | 32 GB |
| Hard drive (#, capacity) | 3.5-inch hard drive, 8 TB |
| ODD | DVD+/-RW, 8X, 9.5T |
| Graphics Adapter | NVIDIA GeForce RTX 4090 |

Table 80. Declared Sound Power (LWAd)

| Operating Mode | Declared Sound Power(LWAd) |
|----------------------------|----------------------------|
| Idle | 3.66 |
| Hard drive Operating | 3.67 |
| CPU Stressed (50% loading) | 3.66 |
| ODD Operating | 4.42 |

Table 81. A-Weighted Sound Pressure Level (dB)

| Declared Sound Pressure (LpA) | | | | |
|-------------------------------|-------------------|--------------------|-----------------------|--------------------|
| Operating Mode | Tabletop System | | Floor Standing System | |
| | Operator Position | Bystander Position | Operator Position | Bystander Position |
| Idle | 28.9 | 23.6 | 22.1 | 20.1 |
| CPU Stressed (50% loading) | 28.8 | 23.5 | 22.1 | 20.0 |

All tests are conducted according to ISO 7779 and declared according to ISO 9296 except CPU Stressed. This test mode is not specified in ISO 7779, but was measured using the same microphone distances and measurement techniques that are defined for the other reported operating modes.

Declared Sound Power rounded to the nearest tenth of a bel per ISO 9296 section 4.4.2.

Chassis enclosure and ventilation requirements

Enclosure ventilation

If your enclosure has doors, they need to be of a type that allows at least 30% airflow through the enclosure (front and back).

Enclosure minimum clearance

Leave a 10.20 cm (4 in.) minimum clearance on all vented sides of the computer to permit the airflow required for proper ventilation.

Recommended enclosure

Do not install your computer in an enclosure that does not allow airflow/dusty environment/temperate over 35°C. Do not put any objects to directly block air-vent. This restricts the airflow and impacts your computer's performance, possibly causing it to overheat.

Open desk minimum clearance

If your computer is installed in a corner, on a desk, or under a desk, leave at least 5.10 cm (2 in.) clearance from the back of the computer to the wall to permit the airflow required for proper ventilation.

System management features

Dell commercial systems come with a number of systems management options that are included by default for In-Band management with our Dell Client Command Suite. In-Band management meaning that the Operating System is functional and the device is connected to a network so that it can be managed. The Dell Client Command Suite of tools can be leveraged individually or with a systems management console like SCCM, LANDESK, KACE, etc.

We also offer Out-of-Band management as an option. Out-of-band management is when the system does not have a functional operating system or is turned off and you still want to be able to manage the system in that state.

Dell Client Command Suite for in-band systems management

Dell Client Command Suite is a free toolkit available for download, for all Latitude Rugged tablets at dell.com/support, that automates and streamlines systems management tasks, saving time, money, and resources. It consists of the following modules that can be used independently, or with a variety of systems management consoles such as SCCM.

Dell Client Command Suite's integration with VMware Workspace ONE Powered by AirWatch, now allows customers to manage their Dell client hardware from the cloud, using a single Workspace ONE console.

Dell Command | Deploy enables easy operating system (OS) deployment across all major OS deployment methodologies and provides numerous system-specific drivers that have been extracted and reduced to an OS-consumable state.

Dell Command | Configure is a graphical user interface (GUI) admin tool for configuring and deploying hardware settings in a pre-OS or post-OS environment, and it operates seamlessly with SCCM and Airwatch and can be self-integrated into LANDesk and KACE. Simply, this is all about the BIOS. Command | Configure allows you to remotely automate and configure over 150+ BIOS settings for a personalized user experience.

Dell Command | PowerShell Provider can do the same things as Command | Configure, but with a different method. PowerShell is a scripting language that allows customers to create a customized and dynamic configuration process.

Dell Command | Monitor is a Windows Management Instrumentation (WMI) agent that provides IT admins with an extensive inventory of the hardware and health-state data. Admins can also configure hardware remotely by using command line and scripting.

Dell Command | Update (end-user tool) is factory-installed and allows admins to individually manage and automatically present and install Dell updates to the BIOS, drivers, and software. Command | Update eliminates the time-consuming hunting and pecking process of update installation.

Dell Command | Update Catalog provides searchable metadata that allows the management console to retrieve the latest system-specific updates (driver, firmware or BIOS). The updates are then delivered seamlessly to end-users using the customer's systems management infrastructure that is consuming the catalog (like SCCM).

Dell Command | vPro Out of Band console extends hardware management to systems that are offline or have an unreachable OS (Dell exclusive features).

Dell Command | Integration Suite for System Center - This suite integrates all the key components of the Client Command Suite into Microsoft System Center Configuration Manager 2012 and Current Branch versions.

Out-of-band systems management

Intel Standard Manageability option **must be configured in our factory at the time of purchase, as it is NOT field upgradable**. It offers out-of-band management and DASH compliance (https://registry.dmtf.org/registry/results/?field_initiative_name%3A%22DASH%201.0%22).

Dell Optimizer

This section details the Dell Optimizer specifications of your Precision 3680 Tower.

On Precision 3680 Tower with Dell Optimizer, the following features are supported:

- **Express Connect**—Automatically joins the access point with the strongest signal, and directs bandwidth to conferencing applications when in use.
- **ExpressResponse**—Prioritizes the most important applications. Applications open faster and perform better.
- **AudioOptimization**—The audio feature enhances the audio functionality during your online meetings. The audio feature helps filter the background noise, stabilize volume, and prioritize preferred voice streaming during online meetings.


For more information about configuring and using these features, see [Dell Optimizer User Guide](#).

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 82. Self-help resources

| Self-help resources | Resource location |
|--|---|
| Information about Dell products and services | www.dell.com |
| Tips |  |
| Contact Support | In Windows search, type <code>Contact Support</code> , and press Enter. |
| Online help for operating system | www.dell.com/support/windows www.dell.com/support/linux |
| Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents. | Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer . |
| Dell knowledge base articles | <ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles. |

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.